

Flare Fittings



SAE 45° Flare

- Meets SAE Functional Requirements
- Resists Vibration
- Resists Mechanical Pull-out
- UL Listed



Inverted Flare

- UL Listed
- Economical
- Steel Nut option









































































Access Valves

- Teflon Seal on Valve core
- Machined to ARI Standards
- Finger Tight Quick Seal Cap


The World Standard

E

Flare to Male NPT	48F Male Connector  Page E8	48IFHD Male Connector  Page E16	AVU1 Male Connector  Page E20	149F/249F Male Elbow  Page E10	249IFHD/249IF Male Elbow  Page E16	AVE1 Male Elbow  Page E20
	145F Branch Tee  Page E9	245IFHD Branch Tee  Page E16	151F Run Tee  Page E11	251IFHD Run Tee  Page E17	AVT3 Run Tee  Page E20	159H/259F 45° Male Elbow  Page E12
256F Adapter Tee  Page E12	Flare to Flare	42F Union  Page E7	42IFHD Union  Page E15	AVU2 Union  Page E19	144F Union Tee  Page E9	244IFHD Union Tee  Page E16
AVT2 Union Tee  Page E20		155F Union Elbow  Page E11	255IFHD Union Elbow  Page E17	660FHD Flare Union  Page E13	147F Cross  Page E9	AVC1 Cross  Page E20
Flare to Female NPT	46F Female Connector  Page E8	46IFHD Female Connector  Page E15	AVUR3 Female Connector  Page E21	150F Female Elbow  Page E11	250IFHD Female Elbow  Page E17	252IFHD Branch Tee  Page E17
	Flare to Metric Straight Thread	48F-MI Male Connector  Page E8	149F-MI Male Elbow  Page E10	159F-MI 45° Male Elbow  Page E12	Flare to Straight Thread	AVU1F1 Male Connector  Page E20
1495F Male Elbow  Page E10		1595F 45° Male Elbow  Page E12	Swivels	14FSV Swivel Nut Connector  Page E6		US5 Flare Adapter  Page E6
AVUS4D Swivel Connector  Page E21	AVTS4 Swivel Run Tee  Page E21	AVTS6 Swivel Branch Tee  Page E22				

Adapters	1F Refrigerant Drum  Page E5	661FHD Reducer  Page E13	664FHD Female Flare to Pipe  Page E13	88AC Refrigerant Adapter  Page E23	880AC Refrigerant Adapter  Page E23	881AC Refrigerant Adapter  Page E23
	Bulkheads	AVU2BH Bulkhead Union  Page E19	AVUS3BH Solder Union  Page E19	Flare to Solder	43F Connector  Page E7	AVUSE Extended Copper Tube  Page E19
AVTSL Extended Solder Tee  Page E19		AVUS3-40 3 Way Solder  Page E21	AVUS3-49 9 Way Solder  Page E21		AVUS Solder Connector  Page E21	
Auxiliary	14FL Long Forged Nut  Page E5	14FSX Short Forged Nut  Page E5	14FS Forged Reducing Nut  Page E6	41FL Long Nut  Page E6	41FS/41FX Shorter Nut  Page E6, E7	411F Inverted Flare Nut  Page E15
	411FS Inverted Flare Nut Steel  Page E15	411FF Inverted Flare Piloted Nut  Page E15	639F Seal Plug  Page E13	640F CAP NUT  Page E13	640QSFC Seal Cap with Chain  Page E22	640QSFCR Seal Cap with Core Remover  Page E22
3GF Seal Bonnet  Page E5	CR Core Remover  Page E22	VC Valve Core  Page E22				



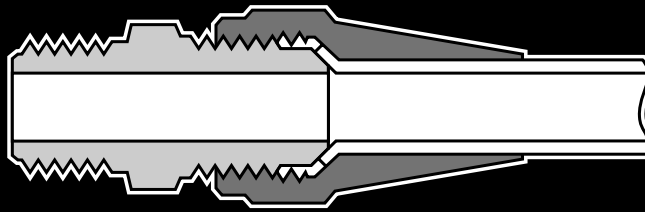

SAE 45° Flared Fittings

E

Advantages

This economical fitting resists mechanical pullout. Can be assembled and disassembled repeatedly. Manufactured from CA 360, CA 345 or CA 377 brass.

Specifications

Listed with Underwriter's Laboratories for flammable liquid, marine, refrigeration and gas applications. Meets functional requirements of SAE J512 and J513. Refer to list of UL listed fittings on page M10 for specific configurations.

Applications

Use with copper, brass, aluminum and welded steel hydraulic tubing that can be flared. Manufactured especially for hard-to-hold liquids and gases.

Working Pressure Ranges

Temperature and type of tubing used are important factors. However, the following table is a good guide for proper selection. Temperature 73°F with copper tubing:

PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
2800	1/8	.030
1900	3/16	.030
1400	1/4	.030
1200	5/16	.032
1000	3/8	.032
750	1/2	.032
650	5/8	.035
550	3/4	.035
450	7/8	.035

Temperature Ranges

From -65° to +250°F.

Vibration

Short nut may be used when vibration is minimal. The long nut offers additional vibration capacity.

Assembly Instructions

1. Cut tubing squarely and clean tube end thoroughly to remove burrs.
2. Place nut onto tube. Place threaded end of nut toward end of tube.
3. Flare tube end with flaring tool to provide 45° flare.
4. Clamp tube flare between nut and nose of fitting body by screwing nut on finger-tight. Tighten with a wrench an additional 1/4 to 1/2 turn past finger tight for a metal-to-metal seal.

Flare fittings are easy to disassemble and may be reassembled repeatedly, for a leak-proof connection.


Order

By part number and name. SAE 45° flared bodies and nuts are separate items. Both numbers must be indicated when ordered.

Nomenclature

Part numbers are constructed from symbols that identify the style and size of the fitting. The first series of numbers and letters identifies the style and type fitting. The second series of numbers describes the size.

Example:

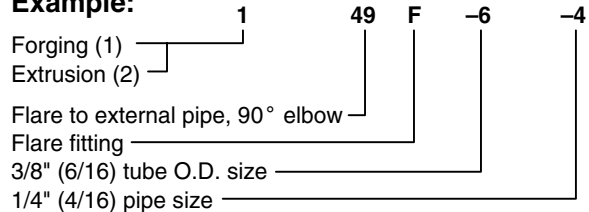

Sizes

Tube sizes are determined by the numbers of sixteenths of an inch in the tube O.D.

Special Fittings

Fitting configurations and/or sizes other than those shown in the catalog can be furnished. It is suggested that a print or sketch be submitted with the inquiry. Special UL stamped fittings are available. Please consult price list.

Pricing


Only items priced in current supplementary price list PL3501 are carried in stock. Price and delivery for non-stock items furnished on request for specified quantity.

Refrigerant Drum a Aapter 1F

Ref. SAE 010165

PART NO.	TUBE O.D.	PIPE THREAD	C HEX	L	FLOW DIA. D
1F-4-8	1/4	1/2	1-1/8	1.12	.189
1F-4-12*	1/4	3/4	1-1/4	1.12	.189
1F-6-12*	3/8	3/4	1-1/4	1.24	.282
1F-8-12*	1/2	3/4	1-1/4	1.37	.407


Gasket Furnished with each 1F adapter

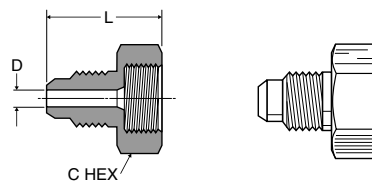

Copper Flare Gasket 2GF

Ref. SAE 010113


PART NO.	TUBE SIZE	A
2GF-3	3/16	.32
2GF-4	1/4	.36
2GF-5	5/16	.43
2GF-6	3/8	.56
2GF-8	1/2	.67
2GF-10	5/8	.78
2GF-12*	3/4	.97



Seal Bonnet 3GF

Ref. SAE 010114


PART NO.	TUBE SIZE	A
3GF-3	3/16	.32
3GF-4	1/4	.37
3GF-5	5/16	.43
3GF-6	3/8	.56
3GF-8	1/2	.67
3GF-10	5/8	.78
3GF-12*	3/4	.97



Long Forged Nut 14FL

Ref. SAE 010167


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
14FL-4	1/4	7/16-20	5/8	.257	.94
14FL-6	3/8	5/8-18	13/16	.382	1.06
14FL-8	1/2	3/4-16	15/16	.507	1.19
14FL-10	5/8	7/8-14	1-1/16	.632	1.44

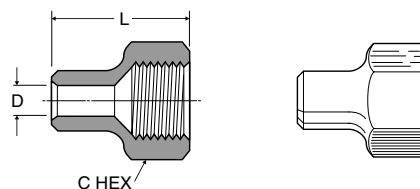

Short Forged Nut 14FSX

Ref. SAE 010166


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
14FSX-4	1/4	7/16-20	5/8	.257	.63
14FSX-5	5/16	1/2-20	11/16	.320	.67
14FSX-6	3/8	5/8-18	13/16	.382	.74
14FSX-8	1/2	3/4-16	15/16	.507	.86
14FSX-10	5/8	7/8-14	1-1/16	.632	.97
14FSX-12*	3/4	1-1/16-14	1-5/16	.757	1.17



*Comes standard with thread protectors

Short Forged Reducing Nuts 14FS


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
14FS-6-4	3/8 to 1/4	5/8-18	13/16	.257	.74
14FS-8-6	1/2 to 3/8	3/4-16	15/16	.382	.86
14FS-10-8	5/8 to 1/2	7/8-14	1-1/16	.507	.99



Swivel Nut Valve Connector 14FSV


Ref. SAE 010108

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
14FSV-4	1/4	7/16-20	5/8	1.31
14FSV-6	3/8	5/8-18	13/16	1.50
14FSV-8	1/2	3/4-16	15/16	1.75
14FSV-10	5/8	7/8-14	1-1/16	2.00

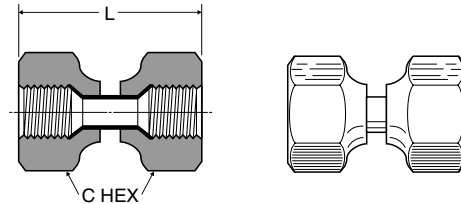

Flare Adapter US5


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
US5-4	1/4	7/16-20	5/8	1.50
US5-6	3/8	5/8-18	13/16	1.58
US5-8	1/2	3/4-16	15/16	1.80
US5-10	5/8	7/8-14	1-1/16	2.18

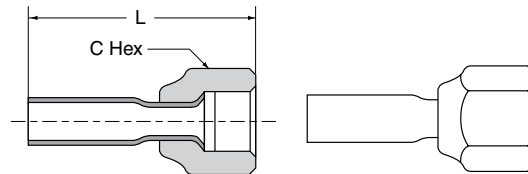

Long Nut 41FL

Ref. SAE 010111


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
41FL-2	1/8	5/16-24	3/8	.133	.75
41FL-3	3/16	3/8-24	7/16	.195	.81
41FL-4	1/4	7/16-20	9/16	.257	.94
41FL-5	5/16	1/2-20	5/8	.320	1.12
41FL-6	3/8	5/8-18	3/4	.382	1.31
41FL-8	1/2	3/4-16	7/8	.507	1.62
41FL-10	5/8	7/8-14	1-1/16	.632	1.88
41FL-12*	3/4	1-1/16-14	1-1/4	.757	2.19

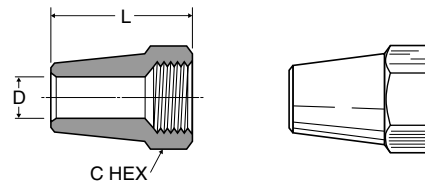

Short Nut 41FS / Shorter Nut 41FX

Ref. SAE 010110


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
41FS-2	1/8	5/16-24	3/8	.132	.50
41FS-3	3/16	3/8-24	7/16	.195	.62
41FS-4	1/4	7/16-20	9/16	.257	.75
41FS-5	5/16	1/2-20	5/8	.320	.88
41FS-6	3/8	5/8-18	3/4	.382	1.00
41FX-6	3/8	5/8-18	3/4	.382	.91
41FS-8	1/2	3/4-16	7/8	.507	1.12
41FX-8	1/2	3/4-16	7/8	.507	1.00
41FS-10	5/8	7/8-14	1-1/16	.632	1.31
41FX-10	5/8	7/8-14	1-1/16	.632	1.06
41FX-12	3/4	1-1/16-14	1-1/4	.757	1.17
41FS-12*	3/4	1-1/16-14	1-1/4	.757	1.50
41FS-14*	7/8	1-1/4-12	1-1/2	.882	1.62

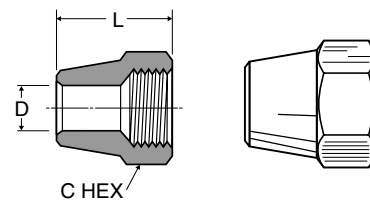

*Comes standard with thread protectors

Reducing Nuts 41FS


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
41FS-6-4	3/8 to 1/4	5/8-18	3/4	.257	1.00
41FS-8-6	1/2 to 3/8	3/4-16	7/8	.382	1.09
41FS-10-8	5/8 to 1/2	7/8-14	1-1/16	.507	1.25

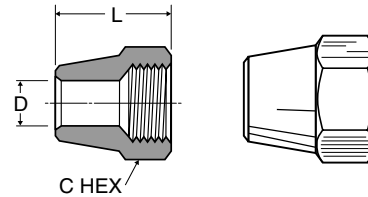

Union 42F

Ref. SAE 010101 *Thread Protectors


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
42F-2	1/8	5/16-24	5/16	.90	.079
42F-3	3/16	3/8-24	3/8	1.04	.125
42F-4	1/4	7/16-20	7/16	1.17	.189
42F-5	5/16	1/2-20	1/2	1.32	.220
42F-6	3/8	5/8-18	5/8	1.48	.282
42F-8	1/2	3/4-16	3/4	1.79	.407
42F-10	5/8	7/8-14	7/8	2.10	.501
42F-12*	3/4	1-1/16-14	1-1/16	2.42	.626
42F-14*	7/8	1-1/4-12	1-1/4	2.72	.751

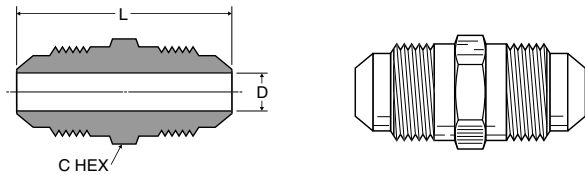

Union Reducers 42F

Ref. SAE 010101


PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	FLOW DIA. D1	FLOW DIA. D2
42F-6-4	1/4	3/8	7/16-20	5/8-18	5/8	1.36	.189	.282
42F-6-5	5/16	3/8	1/2-20	5/8-18	5/8	1.42	.220	.282
42F-8-4	1/4	1/2	7/16-20	3/4-16	3/4	1.54	.189	.407
42F-8-6	3/8	1/2	5/8-18	3/4-16	3/4	1.67	.282	.407
42F-10-6	3/8	5/8	5/8-18	7/8-14	7/8	1.86	.282	.501
42F-10-8	1/2	5/8	3/4-16	7/8-14	7/8	1.98	.407	.501



Flare to Solder 43F

Ref. SAE 010104

PART NO.	TUBE SIZE	SOLDER OD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
43F-4-4	1/4	1/4	7/16-20	7/16	.98	.189
43F-4-5	1/4	5/16	7/16-20	7/16	.98	.189
43F-4-6	1/4	3/8	7/16-20	1/2	.98	.189
43F-6-4	3/8	1/4	5/8-18	5/8	1.17	.189
43F-6-5	3/8	5/16	5/8-18	5/8	1.17	.252
43F-6-6	3/8	3/8	5/8-18	5/8	1.17	.282
43F-6-8	3/8	1/2	5/8-18	5/8	1.23	.282
43F-6-10	3/8	5/8	5/8-18	3/4	1.36	.282
43F-8-6	1/2	3/8	3/4-16	3/4	1.36	.314
43F-8-8	1/2	1/2	3/4-16	3/4	1.42	.407
43F-8-10	1/2	5/8	3/4-16	3/4	1.54	.407
43F-10-8	5/8	1/2	7/8-14	7/8	1.60	.440
43F-10-10	5/8	5/8	7/8-14	7/8	1.73	.501
43F-10-12*	5/8	3/4	7/8-14	7/8	1.86	.501
43F-10-14*	5/8	7/8	7/8-14	1	1.98	.501
43F-12-12*	3/4	3/4	1-1/16-14	1-1/16	2.04	.626
43F-12-14*	3/4	7/8	1-1/16-14	1-1/16	2.17	.626

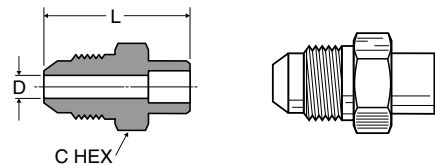


*Comes standard with thread protectors

Female Connector 46F

Ref. SAE 010103

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
46F-2-2	1/8	1/8	5/16-24	9/16	.91	.078
46F-3-2	3/16	1/8	3/8-24	9/16	.95	.125
46F-4-2	1/4	1/8	7/16-20	9/16	1.01	.189
46F-4-4	1/4	1/4	7/16-20	11/16	1.23	.189
46F-4-6	1/4	3/8	7/16-20	13/16	1.26	.189
46F-5-2	5/16	1/8	1/2-20	9/16	1.05	.220
46F-5-4	5/16	1/4	1/2-20	11/16	1.26	.220
46F-6-2	3/8	1/8	5/8-18	5/8	1.10	.282
46F-6-4	3/8	1/4	5/8-18	11/16	1.29	.282
46F-6-6	3/8	3/8	5/8-18	13/16	1.36	.282
46F-6-8	3/8	1/2	5/8-18	1	1.60	.282
46F-8-4	1/2	1/4	3/4-16	3/4	1.39	.407
46F-8-6	1/2	3/8	3/4-16	13/16	1.48	.407
46F-8-8	1/2	1/2	3/4-16	1	1.73	.407
46F-8-12*	1/2	3/4	3/4-16	1-1/4	1.79	.407
46F-10-6	5/8	3/8	7/8-14	7/8	1.57	.501
46F-10-8	5/8	1/2	7/8-14	1	1.80	.501
46F-10-12*	5/8	3/4	7/8-14	1-1/4	1.89	.501

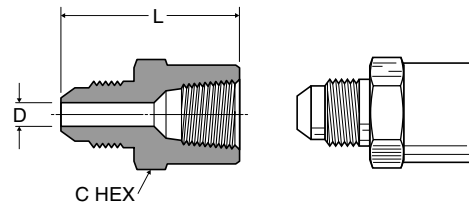


E

Male Connector 48F

Ref. SAE 010102


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
48F-2-2	1/8	1/8	5/16-24	7/16	.91	.078
48F-3-2	3/16	1/8	3/8-24	7/16	.98	.125
48F-3-4	3/16	1/4	3/8-24	9/16	1.17	.125
48F-4-2	1/4	1/8	7/16-20	7/16	1.04	.189
48F-4-4	1/4	1/4	7/16-20	9/16	1.23	.189
48F-4-6	1/4	3/8	7/16-20	11/16	1.29	.189
48F-4-8	1/4	1/2	7/16-20	7/8	1.54	.189
48F-5-2	5/16	1/8	1/2-20	1/2	1.14	.220
48F-5-4	5/16	1/4	1/2-20	9/16	1.32	.220
48F-5-6	5/16	3/8	1/2-20	11/16	1.36	.220
48F-6-2	3/8	1/8	5/8-18	5/8	1.23	.220
48F-6-4	3/8	1/4	5/8-18	5/8	1.42	.282
48F-6-6	3/8	3/8	5/8-18	11/16	1.42	.282
48F-6-8	3/8	1/2	5/8-18	7/8	1.67	.282
48F-6-12*	3/8	3/4	5/8-18	1-1/16	1.79	.282
48F-8-4	1/2	1/4	3/4-16	3/4	1.60	.407
48F-8-6	1/2	3/8	3/4-16	3/4	1.60	.407
48F-8-8	1/2	1/2	3/4-16	7/8	1.79	.407
48F-8-12	1/2	3/4	3/4-16	1-1/16	1.92	.407
48F-10-4	5/8	1/4	7/8-14	7/8	1.79	.313
48F-10-6	5/8	3/8	7/8-14	7/8	1.79	.408
48F-10-8	5/8	1/2	7/8-14	7/8	1.98	.501
48F-10-12*	5/8	3/4	7/8-14	1-1/16	2.04	.501
48F-12-8*	3/4	1/2	1-1/16-14	1-1/16	2.17	.626
48F-12-12*	3/4	3/4	1-1/16-14	1-1/16	2.17	.626
48F-14-12*	7/8	3/4	1-1/4-12	1-1/4	2.35	.751

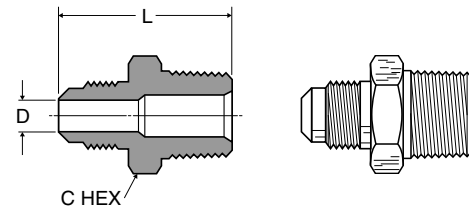

Flare to Metric Adaptor 48F-X-MIX

PART NUMBER	TUBE SIZE	METRIC THREAD	HEX	L	D
48F-8-MII6	1/2	M16 X 1.5	7/8	1.60	.35
48F-10-MI27	5/8	M27 x 2.0	1 1/4	1.87	.50
48F-12-MI27*	3/4	M27 x 2.0	1 1/4	1.99	.63

Note: Fluorocarbon o-ring is standard




*Comes standard with thread protectors



Flare to SAE Straight Thread 485F


PART NO.	TUBE SIZE	STRAIGHT THREAD	HEX	L	FLOW DIA. D
485F-12-8*	3/4	3/4-16	1 1/16	1.80	.397
485F-12-12*	3/4	1 1/16-12	1 1/4	2.03	.615

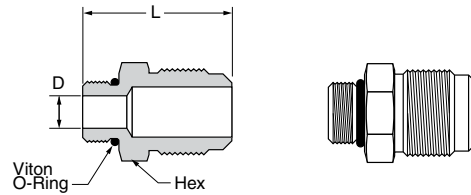

Union Tee 144F-244F


Ref. SAE 010401

PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
144F-3	3/16	3/8-24	1.46	.73	.125
144F-4	1/4	7/16-20	1.72	.86	.189
244F-4	1/4	7/16-20	1.72	.86	.189
144F-5	5/16	1/2-20	1.82	.91	.220
144F-6	3/8	5/8-18	2.08	1.04	.282
144F-8	1/2	3/4-16	2.46	1.23	.407
144F-10	5/8	7/8-14	2.78	1.39	.501

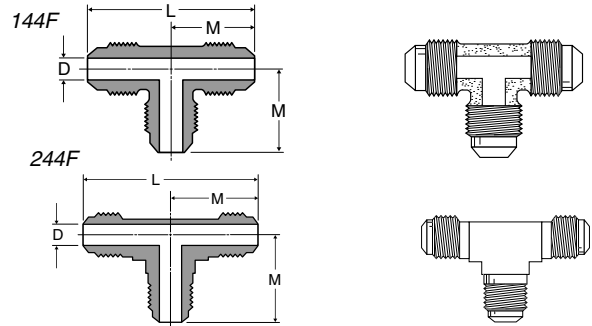

Union Tee 144F-244F combination sizes


PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L	M	M1	FLOW DIA. D
144F-6-6-4	3/8	3/8	1/4	2.08	1.04	.89	.189
144F-8-8-6	1/2	1/2	3/8	2.40	1.20	1.10	.282

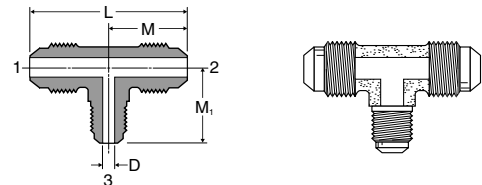

Male Branch Tee 145F

Ref. SAE 010425


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
145F-2-2	1/8	1/8	5/16-24	1.26	.63	.69	.079
145F-4-2	1/4	1/8	7/16-20	1.58	.79	.76	.189
145F-4-4	1/4	1/4	7/16-20	1.78	.89	.92	.189
145F-5-4	5/16	1/4	1/2-20	1.90	.95	.96	.220
145F-6-4	3/8	1/4	5/8-18	1.96	.98	1.05	.282
145F-6-6	3/8	3/8	5/8-18	2.00	1.00	.98	.282
145F-6-8	3/8	1/2	5/8-18	2.28	1.14	1.26	.282
145F-8-6	1/2	3/8	3/4-16	2.40	1.20	1.10	.407
145F-8-8	1/2	1/2	3/4-16	2.46	1.23	1.36	.407
145F-10-8	5/8	1/2	7/8-14	2.78	1.39	1.36	.501

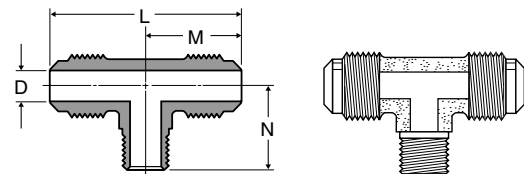

Cross 147F

Ref. SAE 010501

PART NO.	TUBE SIZE	STRAIGHT THREAD	M	FLOW DIA. D
147F-6	3/8	5/8-18	1.04	.282

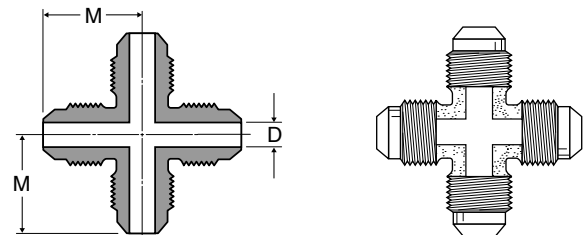



*Comes standard with thread protectors



Male Elbow 149F-249F

Ref. SAE 010202

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	N	FLOW DIA. D
149F-2-2	1/8	1/8	5/16-24	.63	.69	.079
149F-3-2	3/16	1/8	3/8-24	.75	.75	.125
249F-3-2	3/16	1/8	3/8-24	.73	.73	.125
149F-4-2	1/4	1/8	7/16-20	.79	.76	.189
249F-4-2	1/4	1/8	7/16-20	.79	.76	.189
149F-4-4	1/4	1/4	7/16-20	.89	.92	.189
249F-4-4	1/4	1/4	7/16-20	.89	.92	.189
149F-4-6	1/4	3/8	7/16-20	.92	1.01	.189
249F-4-6	1/4	3/8	7/16-20	.92	1.01	.189
149F-4-8	1/4	1/2	7/16-20	1.02	1.26	.189
149F-5-2	5/16	1/8	1/2-20	.90	.79	.220
249F-5-2	5/16	1/8	1/2-20	.89	.77	.220
149F-5-4	5/16	1/4	1/2-20	.95	.95	.220
249F-5-4	5/16	1/4	1/2-20	.95	.92	.220
149F-5-6	5/16	3/8	1/2-20	.98	1.01	.220
149F-6-2	3/8	1/8	5/8-18	1.01	.90	.282
249F-6-2	3/8	1/8	5/8-18	1.01	.89	.220
149F-6-4	3/8	1/4	5/8-18	1.01	1.05	.282
249F-6-4	3/8	1/4	5/8-18	.98	1.04	.282
149F-6-6	3/8	3/8	5/8-18	1.04	1.07	.282
249F-6-6	3/8	3/8	5/8-18	1.04	1.07	.282
149F-6-8	3/8	1/2	5/8-18	1.15	1.26	.282
249F-6-8	3/8	1/2	5/8-18	1.14	1.26	.282
149F-6-12*	3/8	3/4	5/8-18	1.25	1.38	.282
149F-8-4	1/2	1/4	3/4-16	1.20	1.17	.407
149F-8-6	1/2	3/8	3/4-16	1.20	1.10	.407
249F-8-6	1/2	3/8	3/4-16	1.20	1.10	.407
149F-8-8	1/2	1/2	3/4-16	1.28	1.38	.407
249F-8-8	1/2	1/2	3/4-16	1.26	1.36	.407
149F-8-12*	1/2	3/4	3/4-16	1.38	1.38	.407
149F-10-4	5/8	1/4	7/8-14	1.41	1.25	.501
149F-10-6	5/8	3/8	7/8-14	1.41	1.25	.501
149F-10-8	5/8	1/2	7/8-14	1.40	1.39	.501
249F-10-8	5/8	1/2	7/8-14	1.39	1.36	.501
149F-10-12*	5/8	3/4	7/8-14	1.42	1.48	.501
149F-12-8*	3/4	1/2	1-1/16-14	1.60	1.48	.626
149F-12-12*	3/4	3/4	1-1/16-14	1.60	1.62	.626
149F-14-12*	7/8	3/4	1-1/4-12	1.73	1.67	.751

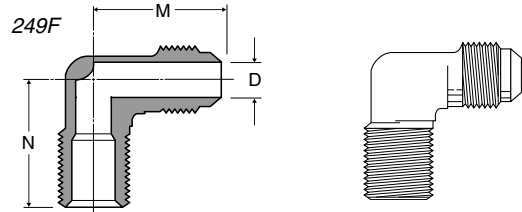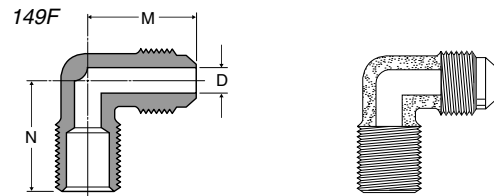


E

Flare Elbow to SAE Metric Straight Thread 149F-X-MIX


PART NUMBER	TUBE SIZE	METRIC THREAD	L	M	N	N1	D
149F-10-MI27	5/8	M27 x 2.0	1.95	1.46	2.12	1.63	.501

Note: Fluorocarbon o-ring is standard

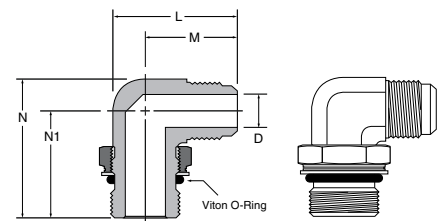

Flare Elbow to SAE Straight Thread 1495F

PART NO.	TUBE SIZE	STRAIGHT THREAD	HEX	L	N	FLOW DIA. D
1495F-12-8*	3/4	3/4-16	7/8	1.60	1.60	.398
1495F-12-12*	3/4	1-1/16-12	1 1/4	1.59	2.12	.616

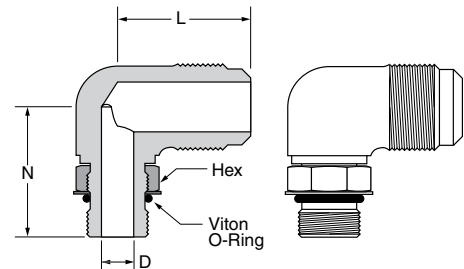


*Comes standard with thread protectors



Female Elbow 150F

Ref. SAE 010203


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	N	FLOW DIA. D
150F-4-2	1/4	1/8	7/16-20	.86	.50	.189
150F-4-4	1/4	1/4	7/16-20	.95	.64	.189
150F-5-4	5/16	1/4	1/2-20	1.01	.64	.220
150F-6-2	3/8	1/8	5/8-18	1.08	.48	.282
150F-6-4	3/8	1/4	5/8-18	1.07	.67	.282
150F-6-6	3/8	3/8	5/8-18	1.14	.67	.282
150F-6-8	3/8	1/2	5/8-18	1.23	.86	.282
150F-8-6	1/2	3/8	3/4-16	1.25	.69	.407
150F-8-8	1/2	1/2	3/4-16	1.36	.92	.407
150F-8-12	1/2	3/4	3/4-16	1.51	.92	.407
150F-10-8*	5/8	1/2	7/8-14	1.48	.98	.501
150F-10-12*	5/8	3/4	7/8-14	1.64	.98	.501

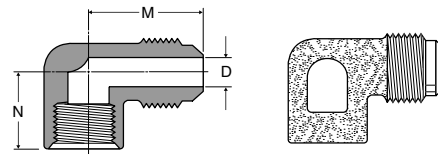

Male Run Tee 151F

Ref. SAE 010424


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	N	FLOW DIA. D
151F-4-2	1/4	1/8	7/16-20	.86	.76	.189
151F-4-4	1/4	1/4	7/16-20	.92	.89	.189
151F-5-4	5/16	1/4	1/2-20	.92	.95	.220
151F-6-4	3/8	1/4	5/8-18	1.04	1.04	.282
151F-6-6	3/8	3/8	5/8-18	.98	1.00	.282
151F-6-8	3/8	1/2	5/8-18	1.26	1.16	.282
151F-8-6	1/2	3/8	3/4-16	1.20	1.10	.407
151F-8-8	1/2	1/2	3/4-16	1.36	1.23	.407
151F-10-8	5/8	1/2	7/8-14	1.36	1.39	.501

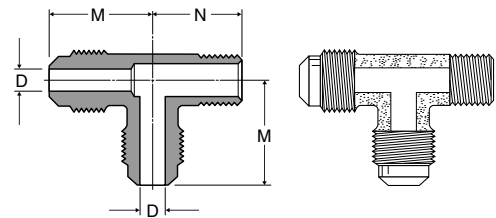

Union Elbow 155F

Ref. SAE 010201

PART NO.	TUBE SIZE	STRAIGHT THREAD	M	FLOW DIA. D
155F-2	1/8	5/16-24	.64	.079
155F-3	3/16	3/8-24	.73	.125
155F-4	1/4	7/16-20	.86	.189
155F-5	5/16	1/2-20	.92	.220
155F-6	3/8	5/8-18	1.04	.282
155F-8	1/2	3/4-16	1.20	.407
155F-10	5/8	7/8-14	1.39	.501
155F-12*	3/4	1-1/16-14	1.64	.626

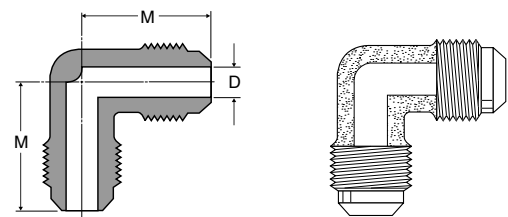



*Comes standard with thread protectors



45° Elbow 159F-259F

Ref. SAE 010302


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	N	FLOW DIA. D
159F-4-2	1/4	1/8	7/16-20	.78	.56	.189
259F-4-2	1/4	1/8	7/16-20	.65	.62	.189
159F-4-4	1/4	1/4	7/16-20	.75	.84	.189
259F-4-4	1/4	1/4	7/16-20	.73	.84	.189
159F-5-2	5/16	1/8	1/2-20	.76	.65	.220
159F-5-4	5/16	1/4	1/2-20	.75	.81	.220
159F-6-2	3/8	1/8	5/8-18	.89	.67	.282
159F-6-4	3/8	1/4	5/8-18	.89	.86	.282
259F-6-4	3/8	1/4	5/8-18	.91	.86	.282
159F-6-6	3/8	3/8	5/8-18	.91	.93	.282
259F-6-6	3/8	3/8	5/8-18	.91	.93	.282
159F-8-4	1/2	1/4	3/4-16	1.06	.95	.407
159F-8-6	1/2	3/8	3/4-16	1.06	.95	.407
259F-8-6	1/2	3/8	3/4-16	1.04	.93	.407
159F-8-8	1/2	1/2	3/4-16	1.12	1.16	.407
159F-10-6	5/8	3/8	7/8-14	1.13	.95	.501
259F-10-6	5/8	3/8	7/8-14	1.20	1.15	.501
159F-10-8	5/8	1/2	7/8-14	1.21	1.16	.501
259F-10-8	5/8	1/2	7/8-14	1.21	.98	.501
159F-12-8*	3/4	1/2	1-1/16-14	1.28	1.16	.626

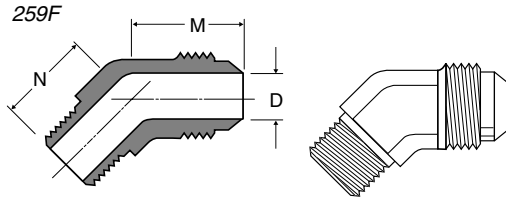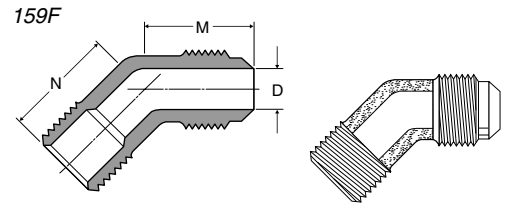

45° Flare Elbow to SAE Metric Straight Thread 159F-X-MIX


PART NUMBER	TUBE SIZE	METRIC THREAD	HEX	M	N	D
159F-8-MII6	1/2	M16 X 1.5	22mm	1.10	1.16	.36
159F-10-MI27	5/8	M27 x 2.0	1 1/4	1.21	1.50	.50

Note: Fluorocarbon o-ring is standard

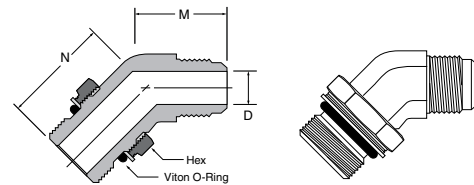


45° Flare to SAE Straight Thread 1595F

PART NO.	TUBE SIZE	STRAIGHT THREAD	HEX	L	N	FLOW DIA. D
1595F-8-8	1/2	3/4-16	7/8	1.00	1.16	.398
1595F-12-8*	3/4	3/4-16	7/8	1.41	1.30	.398
1595F-12-12*	3/4	1 1/16-12	1 1/4	1.41	1.45	.615

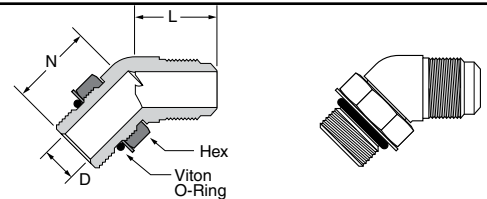


90° Swivel Elbow 166FSV

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	M	N	FLOW DIA. D
166FSV-4-4	1/4	7/16-20	9/16	.86	.93	.189
166FSV-6-6	3/8	5/8-18	3/4	1.04	1.12	.282
166FSV-8-8	1/2	3/4-16	7/8	1.20	1.29	.407
166FSV-10-10	5/8	7/8-14	1	1.39	1.50	.501
166FSV-12-12*	3/4	1-1/16-14	1-1/4	1.60	1.83	.626

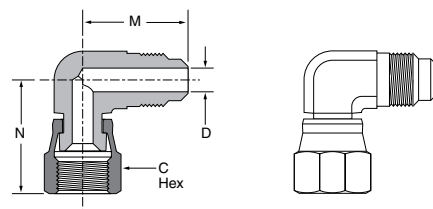

Adapter Tee 256F

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	N	N1	FLOW DIA. D
256F-4-2	1/4	1/8	7/16-20	.86	.77	.47	.220

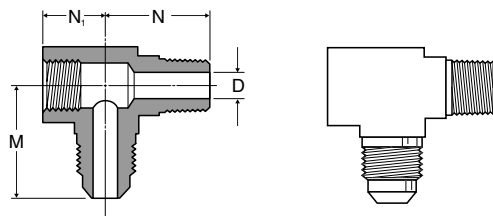



*Comes standard with thread protectors



Flared Seal Plug 639F

Ref. SAE 010109



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
639F-4	1/4	7/16-20	7/16	.69
639F-5	5/16	1/2-20	1/2	.78
639F-6	3/8	5/8-18	5/8	.88
639F-8	1/2	3/4-16	3/4	1.06
639F-10	5/8	7/8-14	7/8	1.19



Cap Nut 640F

Ref. SAE 010112



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
640F-3†	3/16	3/8-24	1/2	.47
640F-4†	1/4	7/16-20	9/16	.53
640F-5†	5/16	1/2-20	5/8	.62
640F-6†	3/8	5/8-18	3/4	.69
640F-8†	1/2	3/4-16	7/8	.84
640F-10†	5/8	7/8-14	1-1/16	.97



Flared Union—Female Flare to Female Flare 660FHD

Ref. SAE 010107



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
660FHD-4†	1/4	7/16-20	5/8	.98	.251
660FHD-6†	3/8	5/8-18	13/16	1.24	.376
660FHD-8†	1/2	3/4-16	15/16	1.43	.501
660FHD-10†	5/8	7/8-14	1-1/16	1.67	.626



Reducer—Male Flare to Female Flare 661FHD

Ref. SAE 010105



PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	FLOW DIA. D
661FHD-4-6†	1/4	3/8	7/16-20	5/8-18	13/16	1.20	.189
661FHD-4-8†	1/4	1/2	7/16-20	3/4-16	15/16	1.36	.189
661FHD-6-4†	3/8	1/4	5/8-18	7/16-20	5/8	1.10	.282
661FHD-6-8†	3/8	1/2	5/8-18	3/4-16	15/16	1.42	.282
661FHD-8-6†	1/2	3/8	3/4-16	5/8-18	13/16	1.39	.407
661FHD-8-10†	1/2	5/8	3/4-16	7/8-14	1-1/16	1.67	.407
661FHD-10-8†	5/8	1/2	7/8-14	3/4-16	15/16	1.60	.501
661FHD-10-12*†	5/8	3/4	7/8-14	1-1/16-14	1-5/16	1.95	.501
661FHD-12-10*†	3/4	5/8	1-1/16-14	7/8-14	1-1/16	1.86	.626




Female Flare to Male Pipe Thread 664FHD

Ref. SAE 010106

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
664FHD-4-2†	1/4	1/8	7/16-20	5/8	.91	.220
664FHD-4-4†	1/4	1/4	7/16-20	5/8	1.01	.252
664FHD-6-4†	3/8	1/4	5/8-18	13/16	1.28	.345
664FHD-8-6†	1/2	3/8	3/4-16	15/16	1.31	.407



†Should be used with 2GF copper flare gasket.
 *Comes standard with thread protectors

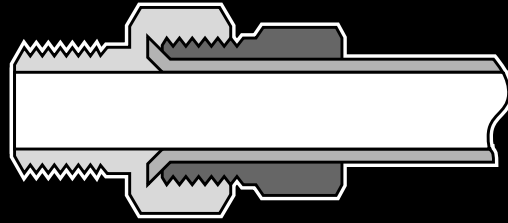

Inverted Flared Fittings

E

Advantages

Built to resist mechanical pullout. This economical fitting can be assembled and disassembled repeatedly. Readily available in a broad selection of styles to fill your specific needs. Manufactured from CA 360 or CA 345 brass.

Specifications

Listed with Underwriter's Laboratories for flammable liquid and gas. Meets functional requirements of SAE, J512. Refer to list of UL listed fittings on page N10 for specific configurations.

Applications

Use with copper, brass, aluminum and welded steel hydraulic tubing that can be flared. Manufactured especially for hard-to-hold liquids and gases.

Working Pressure Ranges

Temperature and type of tubing used are important factors. However, the following table is a good guide for proper selection. Temperature 73°F with copper tubing:

PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
2800	1/8	.030
1900	3/16	.030
1400	1/4	.030
1200	5/16	.032
1000	3/8	.032
750	1/2	.032
650	5/8	.035
550	3/4	.035

Temperature Ranges

From -65° to +250°F.

Vibration

Will withstand minimal vibration movements.

Assembly Instructions

1. Cut tubing squarely and clean tube end thoroughly to remove burrs.
2. Place nut onto tube. Place threaded end of nut toward end of tube.
3. On thin wall copper, welded or brazed tubing, use double flare to prevent pinch-off or cracked flares.
4. Clamp tube flare between nut and flare seat of body by screwing nut on finger-tight. Tighten with a wrench an additional 1/4 turn for a metal-to-metal seal.

Note: The seat dimensions are predicated on practical threading limitations and use of these fittings with double flared tubing.

Order

By part number and name. Bodies and nuts are separate items and individual part numbers must be indicated when ordered.

Nomenclature

Part numbers are constructed from symbols that identify the style and size of the fitting. The first series of numbers and letters identifies the style and type fitting. The second series of numbers describes the size.

Example:

48 1F 1FHD -4 -2

Half Union ————

Inverted Flared (Light Duty) ————

Inverted Flared (Heavy Duty) ————

1/4" (4/16) tube O.D. ————

1/8" (2/16) pipe thread ————

Sizes

Tube sizes are determined by the numbers of sixteenths of an inch in the tube O.D.

Special Fittings

Fitting configurations and/or sizes other than those shown in the catalog can be furnished. It is suggested that a print or sketch be submitted with the inquiry. Special UL stamped fittings are available. Please consult price list.


Pricing

Only items priced in current supplementary price list PL3501 are carried in stock. Price and delivery for non-stock items furnished on request for specified quantity.

Nut 41IF

Ref. SAE 040110


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
41IF-2	1/8	5/16-28	5/16	.52	.133
41IF-3	3/16	3/8-24	3/8	.56	.196
41IF-4	1/4	7/16-24	7/16	.56	.259
41IF-5	5/16	1/2-20	1/2	.62	.321
41IF-6	3/8	5/8-18	5/8	.66	.384
41IF-8	1/2	3/4-18	3/4	.74	.508

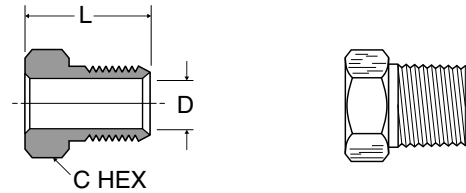

Steel Nut-Zinc Chromate 41IFS

Ref. SAE 040110


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
41IFS-3	3/16	3/8-24	3/8	.56	.196
41IFS-4	1/4	7/16-24	7/16	.56	.259
41IFS-5	5/16	1/2-20	1/2	.62	.321
41IFS-6	3/8	5/8-18	5/8	.66	.384
41IFS-8	1/2	3/4-18	3/4	.74	.508
41IFS-10	5/8	7/8-18	7/8	.80	.633
41IFS-12	3/4	1-1/16-16	1-1/16	.88	.759

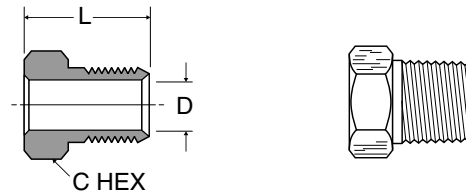

Piloted Nut 41IFF for Single Flared Tubing

Ref. SAE 040110


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
41IFF-2	1/8	5/16-28	5/16	.52	.133
41IFF-3	3/16	3/8-24	3/8	.56	.196
41IFF-4	1/4	7/16-24	7/16	.56	.259
41IFF-5	5/16	1/2-20	1/2	.62	.321
41IFF-6	3/8	5/8-18	5/8	.66	.384
41IFF-8	1/2	3/4-18	3/4	.74	.508

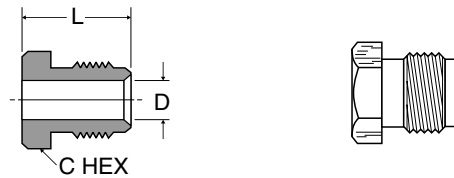

Union 42IFHD

Ref. SAE 040101


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
42IFHD-2	1/8	5/16-28	13/32	.60	.078
42IFHD-3	3/16	3/8-24	15/32	.63	.125
42IFHD-4	1/4	7/16-24	17/32	.63	.189
42IFHD-5	5/16	1/2-20	19/32	.71	.220
42IFHD-6	3/8	5/8-18	3/4	.81	.282
42IFHD-8	1/2	3/4-18	29/32	.92	.407

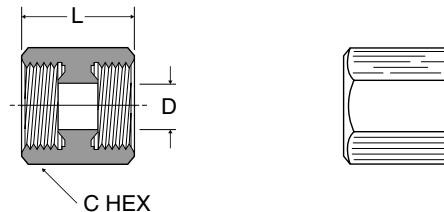

Female Connector 46IFHD

Ref. SAE 040103


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
46IFHD-3-2	3/16	1/8	3/8-24	1/2	.76	.125
46IFHD-4-2	1/4	1/8	7/16-24	17/32	.78	.189
46IFHD-5-2	5/16	1/8	1/2-20	19/32	.79	.220
46IFHD-6-4	3/8	1/4	5/8-18	3/4	1.04	.282
46IFHD-8-6	1/2	3/8	3/4-18	29/32	1.10	.407

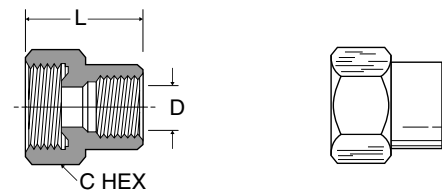

Male Connector 48IFHD

Ref. SAE 040102

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
48IFHD-2-2	1/8	1/8	5/16-28	13/32	.63	.078
48IFHD-3-2	3/16	1/8	3/8-24	15/32	.70	.125
48IFHD-4-2	1/4	1/8	7/16-24	17/32	.74	.189
48IFHD-4-4	1/4	1/4	7/16-24	9/16	.89	.189
48IFHD-5-2	5/16	1/8	1/2-20	19/32	.79	.220
48IFHD-5-4	5/16	1/4	1/2-20	19/32	.98	.220
48IFHD-6-2	3/8	1/8	5/8-18	3/4	.89	.220
48IFHD-6-4	3/8	1/4	5/8-18	3/4	1.03	.282
48IFHD-6-6	3/8	3/8	5/8-18	3/4	1.03	.282
48IFHD-8-4	1/2	1/4	3/4-18	29/32	1.07	.346
48IFHD-8-6	1/2	3/8	3/4-18	29/32	1.07	.407
48IFHD-8-8	1/2	1/2	3/4-18	29/32	1.26	.407
48IFHD-10-8	5/8	1/2	7/8-18	1-1/16	1.32	.533
48IFHD-12-12	3/4	3/4	1-1/16-16	1 1/4	1.38	.626

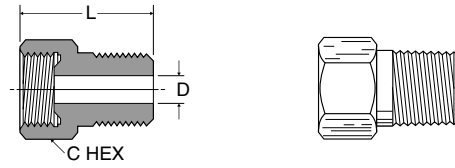


E

Union Tee 244IFHD

Ref. SAE 040401


PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	N	FLOW DIA. D
244IFHD-3	3/16	3/8-24	1.10	.55	.39	.125
244IFHD-4	1/4	7/16-24	1.13	.56	.42	.189
244IFHD-5	5/16	1/2-20	1.26	.63	.45	.220
244IFHD-6	3/8	5/8-18	1.48	.74	.56	.282
244IFHD-8	1/2	3/4-18	1.76	.88	.67	.407

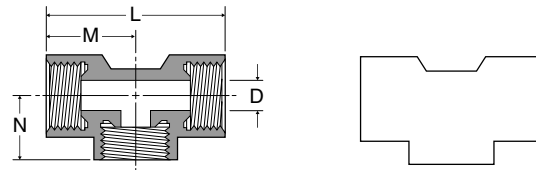

Male Branch Tee 245IFHD

Ref. SAE 040425


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
245IFHD-4-2	1/4	1/8	7/16-24	.85	.43	.64	.189
245IFHD-6-4	3/8	1/4	5/8-18	1.17	.58	.94	.282

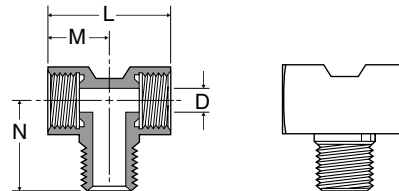

Male Elbow 249IFHD-249IF

Ref. SAE 040202

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
249IFHD-2-2	1/8	1/8	5/16-28	.79	.25	.58	.078
249IFHD-3-2	3/16	1/8	3/8-24	.85	.27	.61	.125
249IFHD-4-2	1/4	1/8	7/16-24	.92	.33	.65	.189
249IFHD-4-4	1/4	1/4	7/16-24	1.10	.28	.82	.189
249IFHD-5-2	5/16	1/8	1/2-20	.98	.47	.68	.220
249IFHD-5-4	5/16	1/4	1/2-20	1.16	.45	.86	.220
249IFHD-6-2	3/8	1/8	5/8-18	1.13	.53	.76	.220
249IF-6-4†	3/8	1/4	5/8-18	1.26	.45	.92	.282
249IFHD-6-4	3/8	1/4	5/8-18	1.32	.53	.95	.282
249IFHD-6-6	3/8	3/8	5/8-18	1.32	.50	.94	.282
249IFHD-8-4	1/2	1/4	3/4-18	1.48	.59	1.02	.407
249IF-8-6+	1/2	3/8	3/4-18	1.42	.53	.99	.407
249IFHD-8-6	1/2	3/8	3/4-18	1.48	.59	1.02	.407
249IFHD-8-8	1/2	1/2	3/4-18	1.67	.66	1.22	.407
249IFHD-10-6	5/8	3/8	7/8-18	1.62	.67	1.09	.533
249IFHD-10-8	5/8	1/2	7/8-18	1.82	.67	1.29	.533

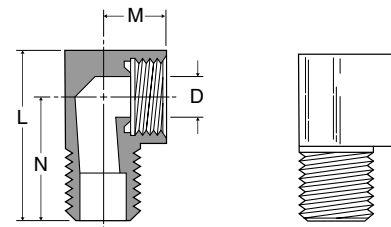


†Light Duty Series

Female Elbow 250IFHD

Ref. SAE 040203


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	N	FLOW DIA. D
250IFHD-3-2	3/16	1/8	3/8-24	.50	.49	.125
250IFHD-4-2	1/4	1/8	7/16-24	.53	.53	.189
250IFHD-5-2	5/16	1/8	1/2-20	.59	.59	.220
250IFHD-6-4	3/8	1/4	5/8-18	.67	.68	.282

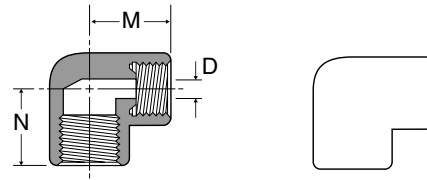

Male Run Tee 251IFHD

Ref. SAE 040424


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	M1	N	FLOW DIA. D
251IFHD-3-2	3/16	1/8	3/8-24	.39	.53	.72	.125
251IFHD-5-2	5/16	1/8	1/2-20	.45	.62	.85	.220
251IFHD-6-4	3/8	1/4	5/8-18	.56	.75	1.08	.282

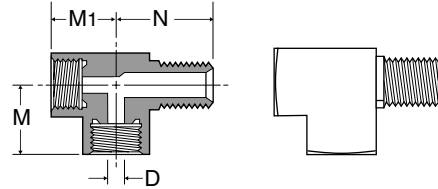

Female Branch Tee 252IFHD


Ref. SAE 040427

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
252IFHD-5-2	5/16	1/8	1/2-20	1.26	.63	.45	.220
252IFHD-6-4	3/8	1/4	5/8-18	1.48	.74	.56	.282

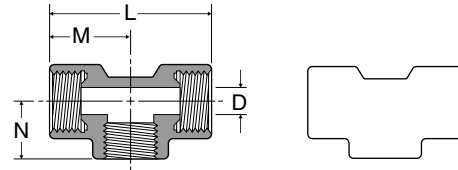

Union Elbow 255IFHD


PART NO.	TUBE SIZE	STRAIGHT THREAD	M	FLOW DIA. D
255IFHD-4	1/4	7/16-24	.55	.189

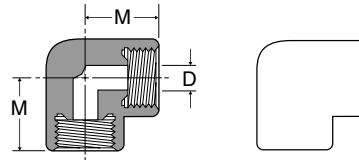


45° Elbow 259IFHD

Ref. SAE 040302

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
259IFHD-3-2	3/16	1/8	3/8-24	17/32	.88	.125
259IFHD-4-2	1/4	1/8	7/16-24	9/16	.94	.189
259IFHD-5-2	5/16	1/8	1/2-20	5/8	1.00	.220
259IFHD-5-4	5/16	1/4	1/2-20	5/8	1.16	.220
259IFHD-6-4	3/8	1/4	5/8-18	13/16	1.34	.282
259IFHD-8-6	1/2	3/8	3/4-18	7/8	1.44	.407
259IFHD-10-8	5/8	1/2	7/8-18	1-1/16	1.75	.533

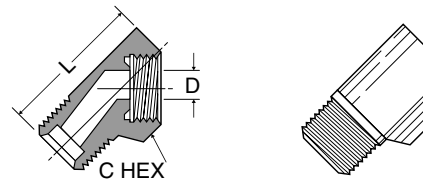

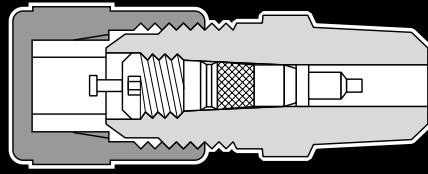

Access Valves

E

Advantages

Access Valves are designed to offer convenient low cost access ports for Refrigeration service. All Access Valves feature 1/4" SAE male flare access ports and are furnished with a finger tight quick seal cap. For greater flexibility, all Tees and Crosses are machined to receive an access core in all 1/4" SAE flare ends. This allows for 2 or more access connections in one fitting plus greater flexibility in the positioning of the valves. All Access Valves with pipe connections have internal ODS solder cups so that these valves may be installed in either of 2 ways.

Applications

Access Valves may be installed in any position on either high or low side for quick testing, pressure checking, purging or charging.

Valve Bodies

Straight Access Valve bodies are manufactured from brass rod CA360 or CA345. Shaped Access Valve bodies are manufactured from brass forge rod CA377. All Access Valve bodies are machined in accordance with ARI standard 720.

Valve Core

Parker valve cores meet ARI standard 720 and are designed for use with all fluorocarbon refrigerants such as R-12, R-22 and R-502, R-134a and are resistant to oils, alkalies and dilute mineral acids.

Working Pressure and Temperature Ranges

Up to 500 PSI
-20°F to +220°F

Order

By part number and name.

Nomenclature

Part numbers are constructed from symbols that identify the style and size of the valve. The first series of letters identifies the style and type valve. The second series of numbers describes the size.

Example:

	X	AV	T1	-2
Packaged	_____	_____	_____	_____
Access Valve	_____	_____	_____	_____
Male Branch Tee	_____	_____	_____	_____
1/8" (2/16) Pipe Thread	_____	_____	_____	_____

Sizes

Tube sizes are determined by the number of sixteenths of an inch in the tube O.D.

Special Fittings


Fitting configurations and/or sizes other than those shown in the catalog can be furnished. It is suggested that a print or sketch be submitted with the inquiry.

Pricing

Only items priced in current supplementary price list PL3501 are carried in stock. Price and delivery for non-stock items furnished on request for specified quantity.

Extended Copper Tube AVUSE


PART NO.	CONNECTION SIZE
AVUSE-2	1/8" O.D. Tube
AVUSE-3	3/16" O.D. Tube
AVUSE-4	1/4" O.D. Tube
AVUSE-5	5/16" O.D. Tube
AVUSE-6	3/8" O.D. Tube
AVUSE-8	1/2" O.D. Tube
AVUSE-9	1/8" O.D. Tube; Additional steps on body for 3/16", 1/4", 5/16", 3/8" O.D. Tube. 3/16", 1/4", or 5/16" Solder Fitting/Swaged Tube.
AVUSE-11	3/16" O.D. Tube; Additional steps on body for 1/4" or 3/8" Solder Fittings/Swaged Tubes 5/16" O.D. Tube.



Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.

Solder Tee AVTS


PART NO.	CONNECTION SIZE
AVTS-4	1/4" O.D. Tube or 3/8" Solder Fitting/Swaged Tube
AVTS-5	5/16" O.D. Tube or 3/8" Solder Fitting/Swaged Tube
AVTS-6	3/8" O.D. Tube or 1/2" Solder Fitting/Swaged Tube
AVTS-8	1/2" O.D. Tube or 5/8" Solder Fitting/Swaged Tube



Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.

Extended Solder Tee AVTSL

PART NO.	CONNECTION SIZE
AVTSL-6	3/8" O.D. Tube/Solder 5/16", 3/8" & 7/16" Tube



Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.


Full Union AVU2

PART NO.	CONNECTION SIZE
AVU2-4	1/4" O.D. Flare Tube With Forged Flare Nut




Bulkhead Union AVU2BH

PART NO.	CONNECTION SIZE
AVU2BH-4	1/4" Bulkhead Access X 1/4" SAE With Forged Nut



Bulkhead Solder Union AVUS3BH

PART NO.	CONNECTION SIZE
AVUS3BH-4	1/4" Bulkhead Access X 3 Way ODS




Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.



Forged Union Tee AVT2

PART NO.	CONNECTION SIZE
AVT2-4	1/4" Access All Ends With 2 Forged Flare Nuts and One Core and Cap



Male Connector AVU1

PART NO.	CONNECTION SIZE
AVU1-2	1/8" Male Pipe or 1/4" O.D. Solder
AVU1-4	1/4" Male Pipe or 5/16" O.D. Solder


Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.



Access Valve Assembly AVUIFI

PART NO.	CONNECTION SIZE
AVUIFI-4	7/16-20 SAE Straight thread O-Ring Port Note: Standard o-ring is neoprene. Consult Brass Products Division for optional o-rings


Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.



Forged Male Elbow AVE1


PART NO.	CONNECTION SIZE
AVE1-2	1/8" Male Pipe or 1/4" O.D. Solder

Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.




Forged Male Run Tee AVT3

PART NO.	CONNECTION SIZE
AVT3-2	1/8" Male Pipe or 1/4" O.D. Solder on Run x 1/4" Access on Run and Branch With One Core and Cap
AVT3-4	1/4" Male Pipe or 5/16" O.D. Solder on Run x 1/4" Access on Run and Branch With One Core and Cap




Forged Male Cross AVC1

PART NO.	CONNECTION SIZE
AVC1-4	1/4" Male Pipe or 5/16" O.D. Solder x 1/4" Access on all Flare Ends With One Core and Cap




Swivel Cross AVCS4D-4

PART NO.	CONNECTION SIZE
AVCS4D-4	1/4" Forged Female Flare Swivel With Depressor x 1/4" Access on all Flare Ends with One Core and Cap



Female Connector AVUR3


PART NO.	CONNECTION SIZE
AVUR3-4	1/4" Female Flare with Copper Gasket



3 Way Solder Connector AVUS3

PART NO.	CONNECTION SIZE
AVUS3-40	For 3/16" O.D. Tube or 1/4" and 3/8" Solder Fitting/Swaged Tube


Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.



9 Way Solder Connector AVUS3

PART NO.	CONNECTION SIZE
AVUS3-49	For 3/16", 1/4", 5/16", 3/8" or 1/2" O.D. Tube. Also Fits 3/16", 1/4" and 5/16" Solder Fitting/Swaged Tube or 1/8" Hole May Be Punched in Larger Size Tube


Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.



Straight Solder Connector AVUS


PART NO.	CONNECTION SIZE
AVUS-42	1/8" O.D. Tube or 1/4" Solder Fitting/Swaged Tube
AVUS-43	3/16" O.D. Tube or 1/4" Solder Fitting/Swaged Tube
AVUS-44	1/4" O.D. Tube or 3/8" Solder Fitting/Swaged Tube
AVUS-45	5/16" O.D. Tube or 1/2" Solder Fitting/Swaged Tube
AVUS-46	3/8" O.D. Tube or 1/2" Solder Fitting/Swaged Tube

Product comes with valve core loose and should be torqued after brazing to ARI 720 standard.




Swivel Connector AVUS4D

PART NO.	CONNECTION SIZE
AVUS4D-4	1/4" Forged Female Flare Swivel Nut with Depressor




Forged Female Run Swivel Tee AVTS4

PART NO.	CONNECTION SIZE
AVTS4-4	1/4" Female Flare Swivel x 1/4" Access on Both Run and Branch
AVTS4D-4	1/4" Female Flare Swivel on Run with Depressor x 1/4" Access on Both Run and Branch

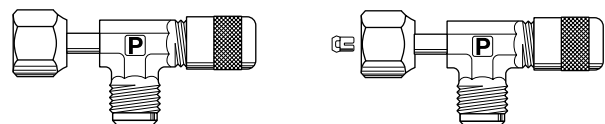


Forged Female Branch Tee AVTS6

PART NO.	CONNECTION SIZE
AVTS6-4	1/4" Female Flare Swivel x 1/4" Access on Both Ends
AVTS6D-4	1/4" Female Flare Swivel on Branch with Depressor x 1/4" Access on Both Ends

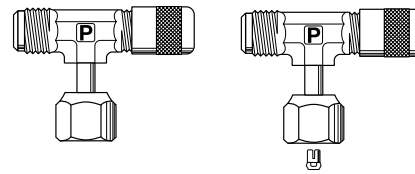


Quick Seal Caps 640QSF

PART NO.	CONNECTION SIZE
640QSF-4	1/4" SAE Seal Cap with Seal Gasket
640QSF-6	3/8" SAE Seal Cap with Seal Gasket




Quick Seal Cap with Core Remover 640QSFCR

PART NO.	CONNECTION SIZE
640QSFCR-4	1/4" SAE Seal Cap Core Remover with internal Seal Gasket



Core Remover CR

PART NO.	CONNECTION SIZE
CR-001	Standard Core Remover




Valve Cores VC

PART NO.	CONNECTION SIZE
VC-001	Replacement Valve Cores For all 1/4" Access Valves




Refrigerant adapter 88AC

PART NO.	CONNECTION SIZE
88AC-8-2	1/8" male pipe to SAE J2197 Acme threaded male connector



Refrigerant adapter 880AC

PART NO.	CONNECTION SIZE
880AC-8-4	1/4" female SAE flare to SAE J2197 Acme threaded male connector



Refrigerant adapter 881AC

PART NO.	CONNECTION SIZE
881AC-8-4	1/4" SAE male flare to SAE J2197 Acme threaded female connector

