

**NEW!**



**Reeltek  
Color  
Options**


# ReelTek Reels



Patent No. 7,150,425

## Rely on ReelTek

A lighter, auto-rewind hose reel designed for air, water, oil and grease applications.

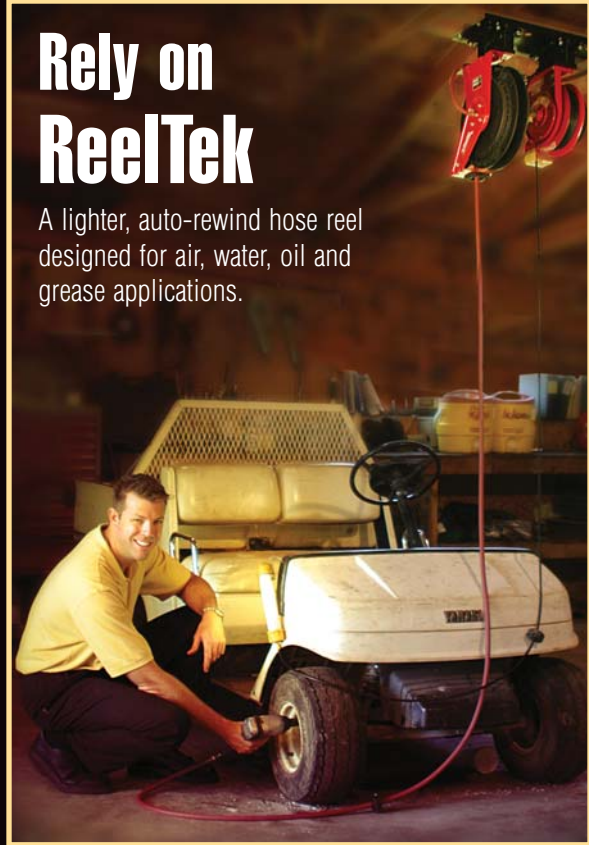

The Links of Eagle Glen, Columbia City, IN



*Wind Things Up With Reelcraft™*


Reelcraft Industries is  
**ISO 9001:2000**  
Certified Since 1996

[www.reelcraft.com](http://www.reelcraft.com)

## Spring Driven Air/Water/Oil/Grease

Series RT - 1/4", 3/8", 1/2" I.D.

Reelcraft presents ReelTek, a lighter, spring-driven hose reel designed for applications that are less demanding, yet require a product that can withstand industrial use. ReelTek's professional grade design incorporates industrial-grade steel and composite material to virtually eliminate corrosion.

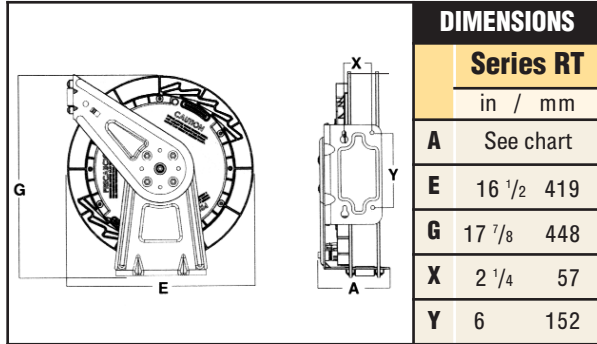

**NEW!**



RT650-OLP

Patent No. 7,150,425

MODELS WITH HOSE				HOSE CAPACITY					MODELS WITHOUT HOSE			
MODEL	WEIGHT	PRESSURE	I.D.	O.D.	(M)NPTF OUTLET	(F)NPTF INLET	LENGTH	MODEL	WEIGHT	PRESSURE	A	
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar	in / mm	
<b>LOW PRESSURE AIR/WATER REELS</b> Maximum Temperature 150° F (65° C)												
RT425-OLP	21 10	300 21	1/4 6	.500 13	1/4	3/8	25 8	RT402-OLP	19 9	300 21	5 3/4	146
RT435-OLP	22 11	300 21	1/4 6	.500 13	1/4	3/8	35 11	RT403-OLP	19 9	300 21	5 3/4	146
RT450-OLP	25 12	300 21	1/4 6	.500 13	1/4	3/8	50 15	RT405-OLP	21 10	300 21	5 3/4	146
RT625-OLP	22 11	300 21	3/8 10	.640 16	1/4	3/8	25 8	RT602-OLP	19 9	300 21	5 3/4	146
RT635-OLP	23 11	300 21	3/8 10	.640 16	1/4	3/8	35 11	RT603-OLP	19 9	300 21	5 3/4	146
RT650-OLP	29 14	300 21	3/8 10	.640 16	1/4	1/2	50 15	RT605-OLP	23 11	300 21	6 1/4	159
RT825-OLP	28 13	300 21	1/2 13	.781 20	1/4	1/2	25 8	RT802-OLP	23 11	300 21	6 1/4	159
RT835-OLP	30 14	300 21	1/2 13	.781 20	1/2	1/2	35 11	RT803-OLP	23 11	300 21	6 1/4	159
RT850-OLP	35 16	300 21	1/2 13	.781 20	1/2	1/2	50 15	RT805-OLP	25 12	300 21	7 3/4	197
<b>MEDIUM PRESSURE OIL REELS</b> Maximum Temperature 150° F (65° C)												
RT625-OMP	27 12	1000 69	3/8 10	.640 16	3/8	3/8	25 8	RT602-OMP	22 10	1000 69	5 3/4	146
RT635-OMP	30 14	1000 69	3/8 10	.640 16	3/8	3/8	35 11	RT603-OMP	22 10	1000 69	5 3/4	146
RT650-OMP	35 16	1000 69	3/8 10	.640 16	3/8	1/2	50 15	RT605-OMP	25 12	1000 69	7 3/4	197
RT825-OMP	31 15	1000 69	1/2 13	.820 21	1/2	3/8	25 8	RT802-OMP	23 11	1000 69	6 1/4	159
RT835-OMP	33 16	1000 69	1/2 13	.820 21	1/2	1/2	35 11	RT803-OMP	23 11	1000 69	6 1/4	159
<b>HIGH PRESSURE GREASE REELS</b> Maximum Temperature 150° F (65° C)												
RT425-OHP	28 13	5000 345	1/4 6	.590 15	1/4	3/8	25 8	RT402-OHP	22 10	5000 345	5 3/4	146
RT435-OHP	31 15	5000 345	1/4 6	.590 15	1/4	3/8	35 11	RT403-OHP	22 10	5000 345	5 3/4	146
RT625-OHP	30 14	4000 276	3/8 10	.750 19	3/8	3/8	25 8	RT602-OHP	22 10	5000 345	5 3/4	146
RT635-OHP	34 16	4000 276	3/8 10	.750 19	3/8	1/2	35 11	RT603-OHP	23 11	5000 345	6 1/4	159
RT650-OHP	39 19	4000 276	3/8 10	.750 19	3/8	1/2	50 15	RT605-OHP	25 12	5000 345	7 3/4	197

North America: **800-444-3134** Asia: **+63 (45) 625-6624**  
 Europe: **+44 (0) 1536 406999** Latin America: **206-489-1685**  
[www.reelcraft.com](http://www.reelcraft.com)

Reelcraft Industries is  
**ISO 9001:2000**  
 Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse California Warehouse  
 Indiana & California Warehouses Canadian Warehouse

### ReelTek is ideal for...

- Light industrial
- Air-powered tools
- Assembly lines
- Machine shops
- Maintenance shops
- Auto/truck repair
- Auto paint & body
- Farm & ranch
- Woodworking
- Garden shops
- Home workshops
- Many more uses

**Rely on ReelTek** for convenience, versatility and value. Keep hoses organized, save time, improve safety, efficiency and extend hose life. ReelTek is available with or without hose, has a long swivel life and attaches to most surfaces that can be drilled. Rely on ReelTek to reduce tangled hoses and improve hose logistics.

#### Kinkless Hose

High quality, industrial-grade kinkless hose is specially blended for use on reels.

#### Long-Lasting Latch Spring


A stainless steel torsion spring is used on the latch to insure maximum life.

#### Corrosion Resistance

Steel components are individually powder coated and combined with composite materials, which virtually eliminates corrosion.

#### Long Swivel Life

Our precision, field-proven swivel assures long service life.

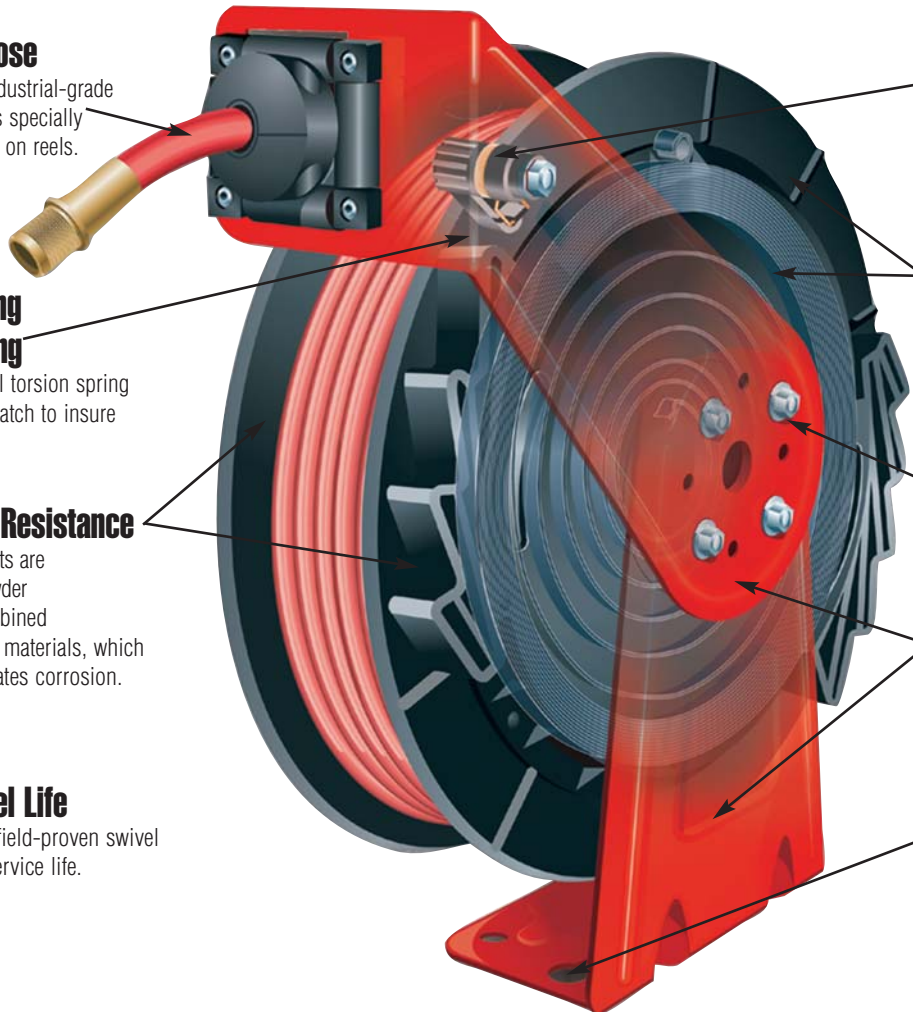

#### Hose Retracts Every Time

ReelTek's latch mechanism is mounted on the arm to insure hose extends and retracts every time.

#### Easy Maintenance

The glass-filled composite spool and spring case contains the industrial-grade drive-spring. The spring is protected from the environment for longer life.

#### Versatile Mounting

The guide arm can be adjusted to any of seven convenient locations.

#### Structural Strength

The base and guide arm are made of heavy gauge steel stampings, with re-enforced ribs to increase structural strength. Main shaft is 1" outside diameter (O.D.), cold-rolled steel.

#### Easy to Mount


The base has two slotted holes for easy mounting and adjustment.

### Add a little color to your order.

Reeltek is now available in Yellow, Black, Blue. Call to place your order today.



RT625-OLP-YW42  
Patent No. 7,150,425



RT650-OLP-BK35  
Patent No. 7,150,425



RT625-OLP-BL40  
Patent No. 7,150,425

North America: **800-444-3134** Asia: **+63 (45) 625-6624**  
Europe: **+44 (0) 1536 406999** Latin America: **206-489-1685**

www.**reelcraft.com**



Wind Things Up With Reelcraft™



**RT850-OLP**  
Patent No. 7,150,425

# Work Smarter

## North America Corporate Headquarters

One Reelcraft Center • P.O. Box 248  
Columbia City, IN 46725-0248  
Ph: 800-444-3134 • Fax: 800-444-4587  
Ph: 260-248-8188 • Fax: 260-248-2605  
e-mail: [reelcraft@reelcraft.com](mailto:reelcraft@reelcraft.com)  
[www.reelcraft.com](http://www.reelcraft.com)

## Latin America and the Middle East

Thompson International, Inc.  
P.O. Box 12958  
Ft. Wayne, IN 46866  
Ph: 260-489-1685  
Fax: 260-489-0203  
e-mail: [info@t-i-i.com](mailto:info@t-i-i.com)  
[www.reelcraft.com/latinamerica](http://www.reelcraft.com/latinamerica)

## China

Reelcraft Changzhou Co., Ltd.  
Building C, No. 229 HeHai West Road  
Changzhou, Jiangsu, China 213022  
Ph: (519) 8512 2391 ext. 8002  
Fax: (519) 8512 9309  
email: [rco@reelcraftchina.com](mailto:rco@reelcraftchina.com)  
[www.reelcraft.com/china](http://www.reelcraft.com/china)

## Europe

Unit 17 • Cronin Courtyard  
Weldon South Industrial Estate  
Corby • Northamptonshire • NN18 8AG  
United Kingdom  
Ph: +44 (0) 1536 406999  
Fax: +44 (0) 1536 406777  
e-mail: [europe@reelcraft.com](mailto:europe@reelcraft.com)  
[www.reelcraft.com/europe](http://www.reelcraft.com/europe)

## Canada


1705 Argentia Rd. Unit #7  
Mississauga, ON L5N 3A9  
Ph: 800-444-3134 • Fax: 800-444-4587  
e-mail: [reelcraft@reelcraft.com](mailto:reelcraft@reelcraft.com)

## Asia Pacific

P.O. Box 53776  
Clark Freeport Zone  
Philippines 2023  
Ph: +63 (45) 625-6624  
Fax: +63 (45) 321-0643  
e-mail: [rap@comclark.com](mailto:rap@comclark.com)  
[www.reelcraft.com/asia](http://www.reelcraft.com/asia)

## Australia

PO Box 6463 BC, Blacktown  
NSW 2148, Australia  
Ph: +61 (2) 9621 8988  
Fax: +61 (2) 9621 7688  
e-mail: [sales@recoila.com](mailto:sales@recoila.com)



917-1097




MCAT-001



737-1194



1123-802



735-1194

Form # 1122-802



*Wind Things Up With Reelcraft™*

[reelcraft.com](http://reelcraft.com)

Reelcraft Industries is  
**ISO 9001:2000**  
Certified Since 1996