

Welding Reels


Hose Reels



Safe-T-Reel Series
T-1225-04-100T



Cable Reels

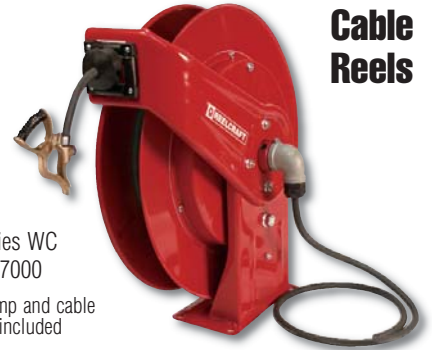

Series WC
WC7000
Clamp and cable
not included

5 reasons why hose reels increase productivity



Improve efficiency
Hoses, cable and cords are where you want/need them.



Increase safety
Reduce tripping accidents and lost work time.



Minimize leakages
Reduce costs of air and water leakages.



Reduce hose wear
Hose and cords on reels can last up to five times longer.



Increase productivity
No more tangled hoses improves efficiency.

Reelcraft: Better by Design

Vulcanized Double Line Hoses

Grade RM: Non-oil resisting rubber tube with a flame and oil resisting rubber cover (acetylene only)
Grade T: Flame and oil resistant tube and cover for use with all fuel gases.

Reinforced Steel

The steel-stamped guide arm is reinforced to reduce bending due to angular pull.

Corrosion-Resistant


Steel components are individually powder coated to virtually eliminate corrosion.

Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance.

Finish with Quality

Our components undergo a special five-stage cleaning process and are individually powder-coated for the highest quality paint adhesion. Excess powder is reclaimed to be environmentally friendly.

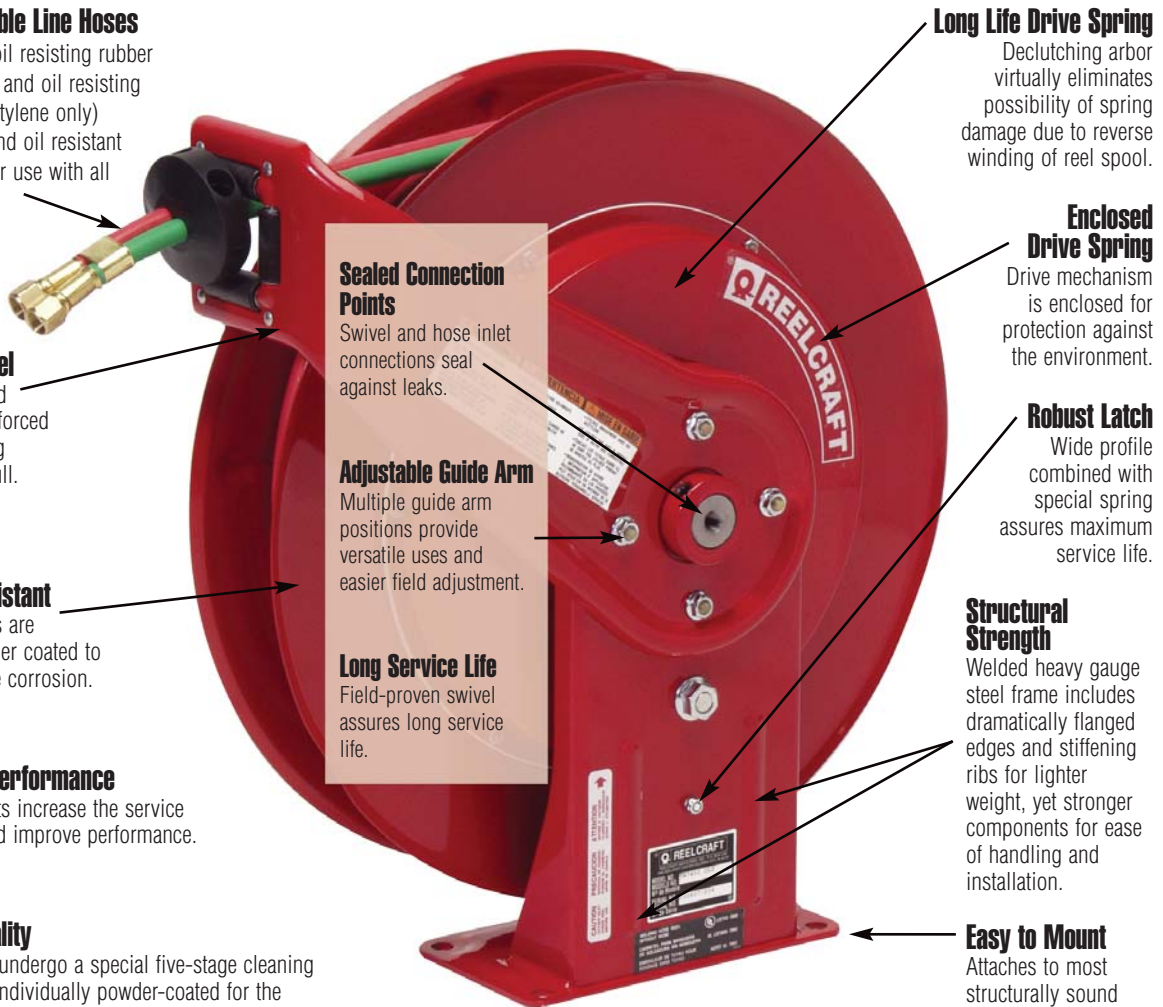

Scaled Connection Points

Swivel and hose inlet connections seal against leaks.

Adjustable Guide Arm

Multiple guide arm positions provide versatile uses and easier field adjustment.

Long Service Life

Field-proven swivel assures long service life.

Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.

Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.

Robust Latch

Wide profile combined with special spring assures maximum service life.

Structural Strength

Welded heavy gauge steel frame includes dramatically flanged edges and stiffening ribs for lighter weight, yet stronger components for ease of handling and installation.

Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

Shown: TW7450 OLP





Complete Welding Series Series TW & BA

NEW!



STW3450 OLP

Series S reels are made in Australia.



TW7450 OLP

UL LISTED




BA36106 L

UL LISTED

APPLICATIONS

- Railroads
- Mobile Service
- Industrial
- Welding Trucks
- Automotive
- Construction Equipment
- Cranes
- Bridge Builders
- Agricultural
- Mining (above ground)
- Workshop



DUAL HOSE REELS FOR OXYGEN/ACETYLENE AND OXYGEN/FUEL GAS APPLICATIONS

	TW5000 O	TW7000 O	BA36106 L	BA36112 L	TW80000 O
	in / mm	in / mm	in / mm	in / mm	in / mm
A	14 1/2 368	20 3/4 514	20 5/8 524	20 5/8 524	25 3/8 645
B	13 3/4 349	19 483	17 3/4 451	17 3/4 451	24 610
C	9 3/4 248	7 7/8 200	9 229	9 229	10 254
D	2 1/2 64	3 7/8 98	9 3/4 248	15 3/4 400	6 152
E	6 152	7 178	16 5/8 423	22 5/8 575	13 330

Model TW5000 O has 5/16" (8mm) diameter mounting holes. TW7000 O has 1/2" (12.7mm) mounting holes and the TW80000 has 1/2" (12.7mm) diameter mounting holes. Acetylene (red) inlet 1/4" FPT / oxygen (green) inlet 1/4" FPT. TW80000 models inlets are 9/16" (14.28mm).

MODELS WITH HOSE

HOSE CAPACITY

MODELS WITHOUT HOSE

MODEL	WEIGHT lbs / kg	PRESSURE psi / bar	I.D. in / mm	O.D. in / mm	REEL INLET (in.)	HOSE/REEL OUTLET (in.)	LENGTH ft / m	MODEL	WEIGHT lbs / kg
OXYGEN/ACETYLENE REELS									
TW5425 OLP	26 14	200 14	1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (F)	25 8	TW5400 OLP	20 9
NEW STW3450 OLPT	27 12	300 21	1/4 6	.530 14	9/16-18 (M)UNF LH/RH	9/16-18 (F)UNF LH/RH	50 15		
TW7450 OLP	53 26	200 14	1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (F)	50 15	TW7400 OLP	43 19
TW7460 OLP	55 27	200 14	1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (F)	60 18	TW7400 OLP	43 19
SERIES 30000 HAND CRANK			1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (M)	125 38	BA36106L	50 22
SERIES 30000 HAND CRANK			1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (M)	250 76	BA36112L	57 25
WELDING GAS (T-GRADE) REELS									
TW5425 OLPT	26 14	200 14	1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (F)	25 8	TW5400 OLPT	20 9
TW7450 OLPT	54 26	200 14	1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (F)	50 15	TW7400 OLPT	43 19
TW7460 OLPT	56 27	200 14	1/4 6	.530 14	1/4 (F)NPT	B 9/16-18 (F)	60 18	TW7400 OLPT	43 19
TW84100 OLPT	105 48	200 14	1/4 6	.530 14	B 9/16-18 (M)	B 9/16-18 (F)	100 30	TW84000 OLPT	80 36
TW86075 OLPT	99 45	200 14	3/8 10	.625 16	B 9/16-18 (M)	B 9/16-18 (F)	75 23	TW86000 OLPT	86 39

(F) = female (M) = male. Reels without hose model series TW5400 OLP, TW 7400 OLP, TW 84000 OLPT and TW 86000 OLPT are U/L listed #70H2. Models without hose do NOT include bumper.

HOSE INLET CONNECTING FITTINGS - OPTIONAL

MODEL NO.	INLET CONNECTION FITTINGS
90°	S300090 Acetylene Bsize 9/16 - 18 LH (M) x 1/4" NPT (M)
	S300091 Oxygen Bsize 9/16 - 18 RH (M) x 1/4" NPT (M)
Straight	261371 Oxygen Bsize 9/16 - 18 RH (M) x 3/8" NPT (M)
	261372 Acetylene/Fuel gas - Bsize 9/16 - 18 LH (M) x 3/8" NPT (M)

Hose supplied on oxygen/acetylene reels is twin-Siamese type meeting R.M.A. and C.G.A. type V.D., grade RM and grade T specifications.

ADJUSTABLE HOSE BUMPERS

FOR REEL SERIES	PART NUMBER	HOSE O.D. in (mm)	HOSE I.D. in / mm
TW5000 TW7000 TW80000 TWD80000	8-HR1004-3	.530 (13) twin	1/4 twin 6
TW80000 TW8000	600521	.680 (17) twin	3/8 twin 10



8-HR1004-3



600521

North America: **800-444-3134**
Europe: **+44 (0) 1536 406999**
reelcraft.com

China: **+86 (519) 8512 2391**
Pacific Rim: **+63 (45) 625-6624**
Latin America: **260-489-1685**






CEA30006

Hand Crank Cable Reels Series CEA

- Designed to increase safety in the work area with a resulting increase in efficiency and productivity
- Welding cable reels store work lead or electrode lead, up to #2/0, safely and effectively when not in use. Each lead requires a separate reel. When welding also refer to ANSI/Asc Z 49.1
- Cable reels have a current path through a continuous 400 AMP, 90VDC (maximum) rated enclosed slip ring
- Stores cable when not in use eliminating tangled, kinked welding cables
- Maintains proper bend radius of cables - providing longer cable life
- Keeps work area and vehicles better organized resulting in better space utilization

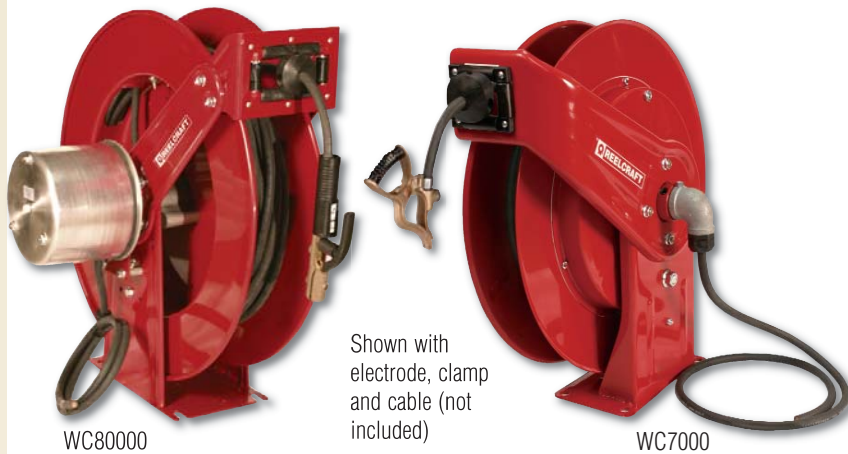

WC80000

Shown with electrode, clamp and cable (not included)

WC7000

Spring Driven Cable Reels Series WC

FEATURES

- ✓ All bolted heavy gauge steel construction provides long life and ease of use and maintenance.
- ✓ Manual drum lock prevents spool from turning when not in use preventing unwanted pay out of cable.

APPLICATIONS

- Steel Mills & Foundries
- Metal Working and fabrication
- Auto / Truck Service
- Power Generation and transmission
- Agricultural
- Railroads
- Mining (above ground)

Caution:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.

SPECIFICATIONS All reels sold without cable

MODEL	REEL CAPACITY				WEIGHT					
	#2 (31mm ²)		#1 (39mm ²)				#1/0 (50mm ²)		#2/0 (62mm ²)	
CABLE SIZE	ft / m		ft / m		ft / m		ft / m		lbs / kg	
CEA30006	300	91	250	76	200	61	150	46	49	22
CEA30012	500*	152	500*	152	400	122	300	91	56	25
WC7000	—		50	15	50	15	50	15	49	22
WC80001	—		75	22	75	22	75	22	80	36
WC80002	—		100	31	—		—		81	37

*May exceed maximum cable length allowable for most welding applications. **NOTE:** Each cable requires separate reel. Spring driven reels ordered without cable do not include bumper stops, see page three(3) to order.

WC DIMENSIONS	WC7000		WC80000	
	in / mm		in / mm	
A	20 1/4	512	25 3/8	645
B	19	483	24	610
C	7 7/8	200	10	254
D	3 7/8	98	6	152
E	14 3/4	362	16	406

Four 1/2 inch (12.7mm) diameter mounting holes.

CEA DIMENSIONS	CEA30006		CEA30012	
	in / mm		in / mm	
A	6	152	12	305
B	9 3/4	248	15 3/4	400
C	11	279	17	432
D	15	381	21	533
E	21	533	27	686

Four 1/2 inch (12.7mm) diameter mounting holes.



Multi-Configurations Safe-T-Reel Series

Premium Quality, Hand Crank Safe-T-Reel Series

Up to 150' fuel gas
Up to 200' 12/3 cable

Ideal for applications where space, weight and flexibility are key, these reels are designed for manual winding of air/water/fuel gases hose, electric cord and welding cable. Versatile in function, select configurations to suit specific needs. Safe-T-Reels offer trouble-free management of large capacities of hose or cord.



T-2462-0

Dual Spool

Side-by-side combinations

Dual Spool

Stacked combinations



T-2464-0

Single Spool

SINGLE SPOOL REELS

MODEL	AMP	REEL CAPACITY		WEIGHT	CABLE	A	B	E
		ft / in	lbs / kg					
SINGLE WELDING CABLE 600 V								
T-1460-0** CA	300	200 60	22 10	-----	19 483	18 457	16 1/4	413
SINGLE POWER CABLE - 3 CONDUCTOR								
T-1535-003** CA	35	200 60	22 10	8 / 3	19 483	18 457	15 3/4	400
T-1535-083-100*	33	100 30	50 23	8 / 3	19 483	18 457	15 3/4	400
T-1535-103-200*	24	200 60	81 37	10 / 3	19 483	18 457	15 3/4	400
T-1535-123-100*	25	100 30	46 21	12 / 3	19 483	18 457	15 3/4	400
T-1535-123-200*	20	200 60	71 32	12 / 3	19 483	18 457	15 3/4	400

*Includes cable. **Does not include cable.

DUAL SPOOL REELS

MODEL	AMP	REEL CAPACITY		WEIGHT	A	B	E
		ft / m	lbs / kg				
DUAL SIDE-BY-SIDE WELDING CABLE (2) 600 V Does not include cable.							
T-2462-0	300	200 60	50 23	19 483	18 457	29 737	
DUAL SIDE-BY-SIDE POWER CABLE / AIR HOSE Does not include hose.							
T-2735-2-0 §	35	200' / 150'	39 1/2 18	19 483	18 457	29 737	
DUAL STACKED WELDING CABLE (2) 600 V Does not include cable.							
T-2464-0	300	200 60	59 28	38 965	18 457	16 1/4 413	

§ Air hose side has 1/2" (12.7mm) inlet

SINGLE SPOOL REELS

MODEL	HOSE I.D.	HOSE O.D.	CAPACITY	WEIGHT	PRESSURE	A	B	E
SINGLE AIR/WATER Maximum temperature 150° F (65° C)								
T-1115-08** CA	1/2 13	.844 22	150 45	17 1/2 8	300 21	19 483	18 457	15 3/4 400
T-1116-08**	1/2 13	.844 22	250 76	17 1/2 8	300 21	19 483	18 457	21 3/4 552
T-1117-12**	3/4 19	1.188 31	50 15	22 10	250 18	19 483	18 457	15 3/4 400
T-1118-12**	3/4 19	1.188 31	75 23	22 10	250 18	19 483	18 457	21 3/4 552
SINGLE OXYGEN-ACETYLENE T-GRADE SEALS Maximum temperature 150° F (65° C)								
T-1225-04** CA	1/4 6	.530 14	150 45	19 9	200 14	19 483	18 457	16 1/8 410
T-1225-04-100T*	1/4 6	.530 14	100 30	44 20	200 14	19 483	18 457	16 1/8 410
T-1226-06**	3/8 10	.625 16	100 30	19 9	200 14	19 483	18 457	16 1/8 410

*Includes cable/hose. **Does not include cable/hose.

Caution: Compressed air hoses should not be converted to oxygen service. Compressed air hoses are often contaminated with an oil coating, which can react explosively when oxygen is introduced. Oxygen/Acetylene cannot be combined with welding cable or power cord. **Note:** Models listed are without hose and/or cable except where noted. Weights listed above are actual product weight without packaging materials. Safe-T-Reels are available with cable or hose and in various combinations. Please consult Reelcraft customer service for additional information.



T-1225-04-100T


Detail of our heavy duty shaft with tapered roller bearing for high rigidity




Shaft sizes are 1 to 1.25" in diameter, supported by tapered roller bearings with 2 to 2.3" housings.

DIMENSIONS


MODEL	C D	
	inches	
T-1115 / T-1117	6	6 1/2
T-1225 / T-1226	6	6 1/2
T-1460 / T-1535	6	6 1/2
T-1116 / T-1118	6	12 1/2



T-2462	6	6 1/2
T-2735	6	6 1/2



T-2464	6	6 1/2
--------	---	-------



All reels have four 1/2" (13 mm) diameter mounting holes

General Industrial Spring Retractable Reels

Series RT

Reelcraft presents series RT, a new, lighter, spring-driven hose reel with a composite spool designed for applications that are less demanding, yet require a product that can withstand industrial use. Easy to install and maintain, the series RT conveniently keeps hose organized for a more efficient, safer work area.

- ✓ Structural Strength
- ✓ Hose Retracts Every Time
- ✓ Long Swivel Life
- ✓ Trouble-Free Maintenance
- ✓ Long Lasting Latch Spring
- ✓ Corrosion Resistance

RT650-OLP
Patent No. 7,150,425



GENERAL INDUSTRIAL SPRING RETRACTABLE REELS								DIMENSIONS					
MODEL	HOSE I.D.		HOSE LENGTH		PRESSURE	(M)NPTF HOSE	(F)NPTF REEL	WEIGHT	LENGTH		WIDTH		HEIGHT
	in / mm	mm	ft / m	m		OUTLET (in.)	INLET (in.)		in / mm	in / mm	in / mm		
LOW PRESSURE AIR/WATER REELS								Maximum Temperature 150° F (65° C)					
RT450-OLP	1/4	6	50	15	300 21	1/4	3/8	25 12	16½	419	5¾	146	17 ⁷ / ₈ 448
RT635-OLP	3/8	10	35	11	300 21	1/4	3/8	23 11	16½	419	5¾	146	17 ⁷ / ₈ 448
RT650-OLP	3/8	10	50	15	300 21	1/4	1/2	29 14	16½	419	6¼	159	17 ⁷ / ₈ 448
RT835-OLP	1/2	13	35	11	300 21	1/2	1/2	30 14	16½	419	6¼	159	17 ⁷ / ₈ 448
RT850-OLP	1/2	13	50	15	300 21	1/2	1/2	35 16	16½	419	7¾	197	17 ⁷ / ₈ 448

Hose included. Additional models available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

Premium Duty Spring Retractable Reels

Series 4000, 5000 & 5005

Series 4000, 5000 & 5005 reels are durable and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. The Quiet Speed latch mechanism offers quiet operation combined with latch cam technology insuring longer latching life and trouble-free performance. The Series 5005 reel can handle hose lengths up to 50 feet. Reels are all steel construction and compact for different applications. The standard low pressure hose is for air or water service only.



A5850 OLP

PREMIUM DUTY SPRING RETRACTABLE REELS								DIMENSIONS					
MODEL	HOSE I.D.		HOSE LENGTH		PRESSURE	(M)NPTF HOSE	(F)NPTF REEL	WEIGHT	LENGTH		WIDTH		HEIGHT
	in / mm	mm	ft / m	m		OUTLET (in.)	INLET (in.)		in / mm	in / mm	in / mm		
LOW PRESSURE AIR/WATER REELS								Maximum Temperature 150° F (65° C)					
4425 OLP	1/4	6	25	8	300 21	1/4	3/8	19 9	12 ⁵ / ₈	321	5 ³ / ₈	136	12 ⁷ / ₈ 327
5450 OLP	1/4	6	50	15	300 21	1/4	3/8	26 12	13½	343	6	152	14½ 368
4625 OLP	3/8	10	25	8	300 21	1/4	3/8	22 10	12 ⁵ / ₈	321	5 ³ / ₈	136	12 ⁷ / ₈ 327
5650 OLP	3/8	10	50	15	300 21	1/4	3/8	36 16	16½	419	6	152	17½ 445
A5825 OLP	1/2	13	25	8	300 21	1/2	3/8	29 14	13½	343	6	152	14½ 368
A5850 OLP	1/2	13	50	15	300 21	1/2	3/8	44 20	16½	419	7	178	17½ 445

Hose included. Additional models available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

Heavy Duty Industrial Spring Retractable Reels

Series 7000

Series 7000 is ideal for the most demanding applications. The reel's base and guide arms are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The Series 7000 incorporates all steel construction and a baked-on powder coat finish to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.



7850 OLP

HEAVY DUTY INDUSTRIAL SPRING RETRACTABLE REELS								DIMENSIONS					
MODEL	HOSE I.D.		HOSE LENGTH		PRESSURE	(M)NPTF HOSE	(F)NPTF REEL	WEIGHT	LENGTH		WIDTH		HEIGHT
	in / mm	mm	ft / m	m		OUTLET (in.)	INLET (in.)		in / mm	in / mm	in / mm		
LOW PRESSURE AIR/WATER REELS								Maximum Temperature 150° F (65° C)					
7650 OLP	3/8	10	50	15	300 21	1/4	1/2	47 22	19	483	7	178	20¼ 521
7670 OLP	3/8	10	70	22	300 21	1/4	1/2	50 23	19	483	7	178	20¼ 521
7850 OLP	1/2	13	50	15	300 21	3/8	1/2	51 24	19	483	7	178	20¼ 521
7925 OLP	3/4	19	25	8	250 17	3/4	3/4	49 22	19	483	7	178	20¼ 521

Hose included. Additional models available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

North America: 800-444-3134

Europe: +44 (0) 1536 406999

reelcraft.com

China: +86 (519) 8512 2391

Pacific Rim: +63 (45) 625-6624

Latin America: 260-489-1685

Reelcraft Industries is

ISO 9001:2000

Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse



Hand Crank Reels Power & Light Cord Reels

Heavy Duty Hand Crank Reels

Series 30000

Reelcraft's series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue. Full flow shaft and ball bearing swivel (excludes 1/2" models) and heavy gauge steel frame, spool and drum ensure longest service life. Vibration-proof self-locking fasteners ensure assembly integrity.

CA33112 L



HEAVY DUTY HAND CRANK REELS								DIMENSIONS							
MODEL	HOSE I.D.		HOSE CAPACITY		PRESSURE		(F) NPTF REEL INLET (in.)	WEIGHT		LENGTH		WIDTH		HEIGHT	
	in / mm	ft / m	ft / m	psi / bar	lbs / kg	in / mm		in / mm	in / mm	in / mm	in / mm				
CA32106 L	1/2 13	100 31	1000 69	1/2	42 19	19 483	17 3/4 451	20 1/4 514							
CA32112 L	1/2 13	200 61	1000 69	1/2	49 22	25 635	17 3/4 451	20 1/4 514							
CA33106 L	3/4 19	50 16	1000 69	3/4	43 19	19 483	17 3/4 451	20 1/4 514							
CA33112 L	3/4 19	100 31	1000 69	3/4	42 19	25 635	17 3/4 451	20 1/4 514							
CA33118 L	3/4 19	175 54	1000 69	3/4	56 25	31 787	17 3/4 451	20 1/4 514							
CA32112 M	1/2 13	200 61	3000 207	1/2	49 22	25 635	17 3/4 451	20 1/4 514							
CA37118 L	1 25	100 31	300 21	1	58 26	34 864	17 3/4 451	20 1/4 514							

Hose not included. Many sizes not listed available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

Power Cord & Light Reels

Series 4000 & 5000

Series 4000 & 5000 power cord and light reels offer many different styles of outlets and lamps. Easy to mount and structurally strong, the power cord and light reels have robotically welded heavy gauge steel frame that attaches to most structurally sound surfaces. Multiple guide arm positions allows for versatile uses and easier field adjustment.



MODEL	ACCESSORY	CORD SPECIFICATIONS				VOLTS	AMPS	WEIGHT	
		LENGTH ft / m	# COND	AWG / mm ²	TYPE			lbs / kg	
L 4545 123 3	Single Receptacle	45 14	3	12 3.32	SJEOW	125	15	28 13	
L 5550 123 3	Single Receptacle	50 15	3	12 3.32	SJEOW	125	15	47 21	
L 4545 123 3A	Single Connector	45 14	3	12 3.32	SJEOW	125	20	29 14	
L 4545 123 7	Duplex Outlet Box w/GFCI (F)	45 14	3	12 3.32	SJEOW	125	*15	29 14	
L 4050 163 1	Incandescent Light	50 15	3	16 1.33	SJTOW	125	13	23 10	
L 4035 163 8	Fluorescent Light & Outlet	35 11	3	16 1.33	SJTO	125	10	26 12	


Incandescent bulb 75 watt maximum. For indoor use only. All models UL listed at 115 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220V. *Inlet plug is NEMA5-15P configuration.




DIMENSIONS	
L4000 Models	
LENGTH:	12.625" 321m
WIDTH:	9.375" 239m
HEIGHT:	13.25" 337m
L5000 Models	
LENGTH:	12.5" 318m
WIDTH:	16.5" 419m
HEIGHT:	17.5" 445m

INLET HOSE ASSEMBLIES			
PART NUMBER	LENGTH ft / m	WEIGHT lbs / kg	
T GRADE TWIN WELDING			
*S601031-2	2 .6096	.70	.317
*S601031-4	4 1.2192	1.12	.508
*S601031-6	6 1.8288	1.90	.861

*For Reel Series TW5000 T and TW7000 T only. Hose ID = 1/4", NPTF (M) Fittings = Female both ends, Working Pressure = 200 psi/14 bar. A flexible hose connection must be used between the hose reel inlet and the source of supply to prevent possible misalignment and binding or warranty is void. Other sizes available as well.

ADDITIONAL ACCESSORIES	
	WALL-MOUNTED UNIVERSAL SWING BRACKET Bracket will pivot approximately 180°. All steel construction with a durable baked on powder coat finish. Weight 6 lbs (3kg). Note: Not for overhead mounting
600626	
FOR REEL SERIES	PART #
4000 / 5000 / 7000	600626
8000 / D80000	600980

ADDITIONAL ACCESSORIES	
	340° PIVOT BASE Aligns reel to the direction of hose or cord run. May be mounted with reel upright or hanging. Weight 10 lbs. (5kg).
600801	
FOR REEL SERIES	PART #
4000 / 5000 / 7000	600608
80000 / D80000	600801
30012	600801-12

North America: **800-444-3134**
Europe: **+44 (0) 1536 406999**
reelcraft.com

China: **+86 (519) 8512 2391**
Pacific Rim: **+63 (45) 625-6624**
Latin America: **260-489-1685**



Rely on Reelcraft™

Built Better to Perform Better™



North America and Corporate Headquarters

2842 E. Business Hwy 30
Columbia City, IN 46725-0248
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
reelcraft@reelcraft.com
www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958, Ft. Wayne, IN 46866
Ph: 260-489-1685 • Fax: 260-489-0203
info@t-i-i.com
www.reelcraft.com/latinamerica

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: +86 (519) 8512 2391 ext. 8002
Fax: +86 (519) 8512 9309
rco@reelcraftchina.com
www.reelcraft.com/china

Europe

Unit 17 • Cronin Courtyard • Weldon South Industrial Estate
Corby • Northamptonshire • NN18 8AG United Kingdom
Ph: +44 (0) 1536 406999 • Fax: +44 (0) 1536 406777
europe@reelcraft.com
www.reelcraft.com/europe

Pacific Rim

P.O. Box 53776, Clark Freeport Zone, Philippines 2023
Ph: +63 (45) 625-6624 • Fax: +63 (45) 321-0643
rap@comclark.com
www.reelcraft.com/asia

Australia

PO Box 6463 BC, Blacktown • NSW 2148, Australia
Ph: +61 (2) 9621 8988 • Fax: +61 (2) 9621 7688
sales@recoila.com
www.reelcraft.com

reelcraft.com

Form # 735-1194 0911

®

