


RACCORDS RAPIDES TYPE CI 1/4

Q-1



	"C" Manual Sleeve	"K" Automatic Ultra-Flo	"S" Automatic Locking Pin	"V" Safety Self-Venting Soft Body	"Z" Safety Self-Venting	"L" Low Force Connection
Front Body	Brass	Brass	Brass	Nickel Plated Brass	Nickel Plated Steel	Nickel Plated Brass
Back Body	Brass	Brass	Brass	Nickel Plated Brass	Nickel Plated Brass	Nickel Plated Brass
Sleeve	Brass	Nickel Plated Hardened Steel	Brass	Thermoplastic	Nickel Plated Brass	Nickel Plated Steel
Valve	Zinc Plated Steel	Nickel Plated Zinc	Brass	Brass	Brass	Brass
Springs	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel	Stainless Steel
Locking System	Stainless Steel Balls	AISI 420 Stainless Steel Balls	AISI 420 Stainless Steel Pins	AISI 420 Stainless Steel Balls & Pins	AISI 420 Stainless Steel Balls	Stainless Steel Balls
Seal	Buna-N	Buna-N	Buna-N	Buna-N	Buna-N	Buna-N
Working Temperature	-40° F to +250° F	-4° F to +210° F	-4° F to +210° F	-4° F to +140° F	-4° F to +140° F	-40° F to +210° F
Maximum Pressure	300 PSI	500 PSI	500 PSI	220 PSI	120 PSI	435 PSI
Connecting Force At 90 PSI	14 Lbs.	23.6 Lbs.	13.5 Lbs.	15.7 Lbs.	23.6 Lbs.	15.7 Lbs.

Type "CI" Industrial Interchange Couplers & Plugs (MIL-C4109)

Series "CI4" 1/4" Body Size Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
Type "C" Manual Sleeve		1/8	CI4C2F	CI4C2M		
		1/4	CI4C4F	CI4C4M	CI4C4B	CI4C4L
		5/16			CI4C5B	
		3/8	CI4C6F	CI4C6M	CI4C6B	CI4C6L
Type "K" Automatic Ultra-Flo		1/4	CI4K4F	CI4K4M	CI4K4B	CI4K4L
		5/16			CI4K5B	
		3/8	CI4K6F	CI4K6M	CI4K6B	CI4K6L
		1/2	CI4K8F	CI4K8M	CI4K8B	
Type "S" Automatic Locking Pin		1/8		CI4S2M		
		1/4	CI4S4F	CI4S4M	CI4S4B	CI4S4L
		5/16			CI4S5B	
		3/8	CI4S6F	CI4S6M	CI4S6B	CI4S6L
Type "V" Safety Self-Venting "Soft Body"		1/4	CI4V4F	CI4V4M	CI4V4B	
		5/16			CI4V5B	
		3/8	CI4V6F	CI4V6M	CI4V6B	
		1/2	CI4V8F	CI4V8M	CI4V8B	
Type "Z" Self-Venting		1/4	CI4Z4F	CI4Z4M	CI4Z4B	
		5/16			CI4Z5B	
		3/8	CI4Z6F	CI4Z6M	CI4Z6B	
		1/2	CI4Z8F	CI4Z8M	CI4Z8B	
Type "L" Low Force Connection		1/4	CI4L4F	CI4L4M	CI4L4B	
		5/16			CI4L5B	
		3/8	CI4L6F	CI4L6M	CI4L6B	
		1/2			CI4L8B	
Plug Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
Type "P" Zinc Plated Hardened Steel		1/8	CI4P2F	CI4P2M		
		1/4	CI4P4F	CI4P4M	CI4P4B	CI4P4L
		5/16			CI4P5B	
		3/8	CI4P6F	CI4P6M	CI4P6B	CI4P6L
	1/2			CI4P8B		

RACCORDS RAPIDES TYPE CI 3/8 & 1/2

Q-2



	"C" Manual Sleeve	"S" Automatic Locking Pin
Front Body	Zinc Plated Steel	Zinc Plated Steel (Chromalized)
Back Body	Zinc Plated Steel	Brass
Sleeve	Zinc Plated Steel	Brass
Valve	Zinc Plated Steel	Brass
Springs	AISI 301 Stainless Steel	AISI 301 Stainless Steel
Locking System	Stainless Steel Balls	AISI 420 Stainless Steel Pins
Seal	Buna-N	Buna-N
Working Temperature	-40° F to +250° F	-4° F to +210° F
Maximum Pressure	300 PSI	500 PSI
Connecting Force At 90 PSI	29 Lbs.	23.6 Lbs.

	"C" Manual Sleeve	"S" Automatic Locking Pin
Front Body	Zinc Plated Steel	Brass
Back Body	Zinc Plated Steel	Brass
Sleeve	Zinc Plated Steel	Brass
Valve	Zinc Plated Steel	Brass
Springs	AISI 301 Stainless Steel	AISI 301 Stainless Steel
Locking System	Stainless Steel Balls	AISI 420 Stainless Steel Pins
Seal	Buna-N	Buna-N
Working Temperature	-40° F to +250° F	-4° F to +210° F
Maximum Pressure	300 PSI	500 PSI
Connecting Force At 90 PSI	49 Lbs.	40.5 Lbs.

Type "CI" Industrial Interchange Couplers & Plugs (MIL-C4109)

Series "CI6" 3/8" Body Size Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
 Type "C" Manual Sleeve		1/4	CI6C4F	CI6C4M		
		3/8	CI6C6F	CI6C6M	CI6C6B	CI6C6L
		1/2	CI6C8F	CI6C8M	CI6C8B	
 Type "S" Automatic Locking Pin		1/4	CI6S4F	CI6S4M	CI6S4B	
		5/16			CI6S5B	
		3/8	CI6S6F	CI6S6M	CI6S6B	
		1/2	CI6S8F	CI6S8M	CI6S8B	
		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
		1/4	CI6P4F	CI6P4M	CI6P4B	
 Type "P" Zinc Plated Hardened Steel		5/16			CI6P5B	
		3/8	CI6P6F	CI6P6M	CI6P6B	CI6P6L
		1/2	CI6P8F	CI6P8M	CI6P8B	CI6P8L

Series "CI8" 1/2" Body Size Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
 Type "C" Manual Sleeve		3/8	CI8C6F	CI8C6M	CI8C6B	CI8C6L
		1/2	CI8C8F	CI8C8M	CI8C8B	CI8C8L
		3/4	CI8C9F	CI8C9M		
 Type "S" Automatic Locking Pin		1/4	CI8S4F	CI8S4M		
		3/8	CI8S6F	CI8S6M	CI8S6B	
		1/2	CI8S8F	CI8S8M	CI8S8B	
		3/4	CI8S9F	CI8S9M		
		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
		3/8	CI8P6F	CI8P6M	CI8P6B	CI8P6L
		1/2	CI8P8F	CI8P8M	CI8P8B	
 Type "P" Zinc Plated Hardened Steel		3/4	CI8P9F	CI8P9M	CI8P9B	

RACCORDS RAPIDES TYPE CT 1/4 & 3/8

Q-3



	"C" Manual Sleeve
Front Body	Brass
Back Body	Brass
Sleeve	Brass
Valve	Zinc Plated Steel
Springs	AISI 301 Stainless Steel
Locking System	Stainless Steel Balls
Seal	Buna-N
Working Temperature	-40° F to +250° F
Maximum Pressure	300 PSI
Connecting Force At 90 PSI	16 Lbs.

	"C" Manual Sleeve
Front Body	Zinc Plated Steel
Back Body	Zinc Plated Steel
Sleeve	Zinc Plated Steel
Valve	Zinc Plated Steel
Springs	AISI 301 Stainless Steel
Locking System	Stainless Steel Balls
Seal	Buna-N
Working Temperature	-40° F to +250° F
Maximum Pressure	300 PSI
Connecting Force At 90 PSI	36 Lbs.

Type "CT" Automotive (Tru-Flate) Interchange Couplers & Plugs

Series "CT4" 1/4" Body Size						
Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
	Type "C" Manual Sleeve	1/8	CT4C2F	CT4C2M		
		1/4	CT4C4F	CT4C4M	CT4C4B	CT4C4L
		5/16			CT4C5B	
		3/8	CT4C6F	CT4C6M	CT4C6B	CT4C6L
Plug Type						
	Type "P" Zinc Plated Hardened Steel	1/8	CT4P2F	CT4P2M		
		1/4	CT4P4F	CT4P4M	CT4P4B	CT4P4L
		3/8	CT4P6F	CT4P5M	CT4P6B	CT4P6L

Type "CT" Automotive (Tru-Flate) Interchange Couplers & Plugs

Series "CT6" 3/8" Body Size						
Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
	Type "C" Manual Sleeve	1/4	CT6C4F	CT6C4M		
		3/8	CT6C6F	CT6C6M	CT6C6B	CT6C6L
		1/2	CT6C8F	CT6C8M	CT6C8B	
Plug Type						
	Type "P" Zinc Plated Hardened Steel	1/4	CT6P4F	CT6P4M		
		3/8	CT6P6F	CT6P6M	CT6P6B	CT6P6L



	"C" Manual Sleeve	"K" Automatic Ultra-Flo	"S" Automatic Locking Pin	"V" Safety Self-Venting Soft Body	"S" Automatic Locking Pin
Front Body	Brass	Brass	Brass	Nickel Plated Brass	Brass
Back Body	Brass	Brass	Brass	Nickel Plated Brass	Brass
Sleeve	Brass	Nickel Plated Hardened Steel	Brass	Thermoplastic	Brass
Valve	Zinc Plated Steel	Nickel Plated Zinc	Brass	Brass	Brass
Springs	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel
Locking System	Stainless Steel Balls	AISI 420 Stainless Steel Balls	AISI 420 Stainless Steel Pins	AISI 420 Stainless Steel Balls & Pins	AISI 420 Stainless Steel Pins
Seal	Buna-N	Buna-N	Buna-N	Buna-N	Buna-N
Working Temperature	-40° F to +250° F	-4° F to +210° F	-4° F to +210° F	-4° F to +140° F	-4° F to +210° F
Maximum Pressure	300 PSI	500 PSI	500 PSI	220 PSI	500 PSI
Connecting Force At 90 PSI	14 Lbs.	22.5 Lbs.	13.5 Lbs.	13.5 Lbs.	25.6 Lbs.

Type "CA" Aro Interchange Couplers & Plugs

Series "CA4" 1/4" Body Size Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
Type "C" Manual Sleeve	1/4	CA4C4F	CA4C4M	CA4C4B	CA4C4L	
	3/8	CA4C6F	CA4C6M		CA4C6L	
Type "K" Automatic Ultra-Flo	1/4	CA4K4F	CA4K4M	CA4K4B	CA4K4L	
	5/16			CA4K5B		
	3/8	CA4K6F	CA4K6M	CA4K6B	CA4K6L	
	1/2	CA4K8F	CA4K8M	CA4K8B		
Type "S" Automatic Locking Pin	1/4	CA4S4F	CA4S4M	CA4S4B		
	5/16			CA4S5B		
	3/8	CA4S6F	CA4S6M	CA4S6B		
	1/2			CA4S8B		
Type "V" Safety Self-Venting "Soft Body"	1/4	CA4V4F	CA4V4M	CA4V4B		
	5/16			CA4V5B		
	3/8	CA4V6F	CA4V6M	CA4V6B		
	1/2	CA4V8F	CA4V8M	CA4V8B		
Plug Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
Type "P" Zinc Plated Hardened Steel	1/8			CA4P2M		
	1/4	CA4P4F	CA4P4M	CA4P4B	CA4P4L	
	5/16			CA4P5B		
	3/8	CA4P6F	CA4P6M	CA4P6B		
	1/2			CA4P8B		

Series "CA6" 3/8" Body Size Coupler Type		Connection Size	Female			
Type "S" Automatic Locking Pin	1/4	CA6S4F				
	3/8	CA6S6F				
Plug Type		Connection Size	Female	Male	Hose Barb	
Type "P" Zinc Plated Hardened Steel	1/4				CA6P4B	
	5/16				CA6P5B	
	3/8	CA6P6F	CA6P6M	CA6P6B		
	1/2	CA6P8F	CA6P8M	CA6P8B		
	3/4	CA6P9F	CA6P9M	CA6P9B		

RACCORDS RAPIDES TYPE CE 1/4

Q-5




	"K" Automatic Ultra-Flo	"S" Automatic Locking Pin	"V" Safety Self-Venting Soft Body	"Z" Safety Self-Venting	"L" Low Force Connection
Front Body	Brass	Brass	Nickel Plated Brass	Nickel Plated Steel	Nickel Plated Brass
Back Body	Brass	Brass	Nickel Plated Brass	Nickel Plated Brass	Nickel Plated Brass
Sleeve	Nickel Plated Hardened Steel	Brass	Thermoplastic	Nickel Plated Brass	Zinc Plated Steel
Valve	Nickel Plated Zinc	Brass	Brass	Brass	Brass
Springs	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel	AISI 301 Stainless Steel	Stainless Steel
Locking System	AISI 420 Stainless Steel Balls	AISI 420 Stainless Steel Pins	AISI 420 Stainless Steel Balls & Pins	AISI 420 Stainless Steel Balls	Stainless Steel Balls
Seal	Buna-N	Buna-N	Buna-N	Buna-N	Buna-N
Working Temperature	-4° F to +210° F	-4° F to +210° F	-4° F to +140° F	-4° F to +140° F	-40° F to +210° F
Maximum Pressure	500 PSI	500 PSI	220 PSI	120 PSI	435 PSI
Connecting Force At 90 PSI	26.9 Lbs.	20.2 Lbs.	21.4 Lbs.	26.9 Lbs.	17.9 Lbs.

Type "CE" European (High Flow) Interchange Couplers & Plugs












Series "CE4" 1/4" Body Size						
Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
	Type "K" Automatic Ultra-Flo	1/4	CE4K4F	CE4K4M	CE4K4B	CE4K4L
		5/16			CE4K5B	
		3/8	CE4K6F	CE4K6M	CE4K6B	CE4K6L
		1/2	CE4K8F	CE4K8M	CE4K8B	CE4K8L
	Type "S" Automatic Pin Lock	1/4	CE4S4F	CE4S4M	CE4S4B	CE4S4L
		5/16			CE4S5B	
		3/8	CE4S6F	CE4S6M	CE4S6B	CE4S6L
		1/2	CE4S8F	CE4S8M	CE4S8B	CE4S8L
	Type "V" Safety Self-Venting "Soft Body"	1/4	CE4V4F	CE4V4M	CE4V4B	
		5/16			CE4V5B	
		3/8	CE4V6F	CE4V6M	CE4V6B	
		1/2	CE4V8F	CE4V8M	CE4V8B	
	Type "Z" Self-Venting	1/4	CE4Z4F	CE4Z4M	CE4Z4B	
		5/16			CE4Z5B	
		3/8	CE4Z6F	CE4Z6M	CE4Z6B	
		1/2	CE4Z8F	CE4Z8M	CE4Z8B	
	Type "L" Low Force Connection	1/4	CE4L4F	CE4L4M	CE4L4B	
		5/16			CE4L5B	
		3/8	CE4L6F	CE4L6M	CE4L6B	
		1/2	CE4L8F	CE4L8M	CE4L8B	
Plug Type		Connection Size	Female	Male	Hose Barb	
	Type "P" Zinc Plated Hardened Steel	1/8	CE4P2F	CE4P2M		
		1/4	CE4P4F	CE4P4M	CE4P4B	
		5/16			CE4P5B	
		3/8	CE4P6F	CE4P6M	CE4P6B	
		1/2	CE4P8F	CE4P8M	CE4P8B	
	Type "N" Brass	1/8			CE4NFB	
		1/4	CE4N4F	CE4N4M	CE4N4B	
		5/16			CE4N5B	
		3/8	CE4N6F	CE4N6M	CE4N6B	
		1/2	CE4N8F	CE4N8M	CE4N8B	

RACCORDS RAPIDES TYPE CE 3/8

Q-6




	"K" Automatic Ultra-Flo
Front Body	Brass
Back Body	Brass
Sleeve	Nickel Plated Hardened Steel
Valve	Brass
Springs	AISI 301 Stainless Steel
Locking System	AISI 420 Stainless Steel Balls
Seal	Buna-N
Working Temperature	-4° F to +210° F
Maximum Pressure	500 PSI
Connecting Force At 90 PSI	40.5 Lbs.

Series "CE6" 3/8" Body Size Coupler Type		 Connection Size	 Female	 Male	 Hose Barb
	Type "K" Automatic Ultra-Flo	1/4			CE6K4B
		5/16			CE6K5B
		3/8	CE6K6F	CE6K6M	CE6K6B
		1/2	CE6K8F	CE6K8M	CE6K8B
		3/4	CE6K9F	CE6K9M	CE6K9B
Plug Type		 Connection Size	 Female	 Male	 Hose Barb
	Type "P" Zinc Plated Hardened Steel	1/4	CE6P4F	CE6P4M	CE6P4B
		5/16			CE6P5B
		3/8	CE6P6F	CE6P6M	CE6P6B
		1/2	CE6P8F	CE6P8M	CE6P8B
		3/4	CE6P9F	CE6P9M	CE6P9B
	Type "N" Brass	1/4	CE6N4F	CE6N4M	CE6N4B
		5/16			CE6N5B
		3/8	CE6N6F	CE6N6M	CE6N6B
		1/2	CE6N8F	CE6N8M	CE6N8B
		3/4	CE6N9F	CE6N9M	CE6N9B













RACCORDS RAPIDES TYPE CS 1/4


Q-7



	"C" Twist Lock	"K" Automatic Ultra-Flo
Front Body	Brass / Aluminum	Zinc Plated Hardened Steel
Back Body	Brass	Nickel Plated Brass
Sleeve	Zinc Plated Steel (Yellow Chromate Finish)	Nickel Plated Hardened Steel
Valve	Zinc Plated Steel (Yellow Chromate Finish)	Brass
Springs	AISI 302 Stainless Steel	AISI 303 Stainless Steel
Locking System	Zinc Plated Steel Paws	AISI 420 Stainless Steel Balls
Seal	Buna-N	Buna-N
Working Temperature	-40° F to +250° F	-4° F to +210° F
Maximum Pressure	300 PSI	500 PSI
Connecting Force At 90 PSI	22 Lbs.	26.9 Lbs.






Type "CS" Schrader Interchange Couplers & Plugs

Series "CS4" 1/4" Body Size Coupler Type		 Connection Size	 Female	 Male	 Hose Barb	 Push-Lock Hose Barb
	Type "C" Twist Lock	1/8	CS4C2F	CS4C2M		
		1/4	CS4C4F	CS4C4M	CS4C4B	CS4C4L
		5/16			CS4C5B	
		3/8	CS4C6F	CS4C6M	CS4C6B	CS4C6L
	Type "K" Automatic Ultra-Flo	1/4	CS4K4F	CS4K4M	CS4K4B	
		5/16			CS4K5B	
		3/8	CS4K6F	CS4K6M	CS4K6B	
Plug Type		 Connection Size	 Female	 Male	 Hose Barb	
	Type "P" Zinc Plated Hardened Steel	1/8	CS4P2F	CS4P2M		
		1/4	CS4P4F	CS4P4M	CS4P4B	
		5/16			CS4P5B	
		3/8			CS4P6B	



	"C" Manual Sleeve
Front Body	Brass
Back Body	Brass
Sleeve	Brass
Valve	Zinc Plated Steel
Springs	AISI 301 Stainless Steel
Locking System	Stainless Steel Balls
Seal	Buna-N
Working Temperature	-40° F to +250° F
Maximum Pressure	300 PSI
Connecting Force At 90 PSI	18 Lbs.

Type "CL" Lincoln Interchange Couplers & Plugs

Series "CL4" 1/4" Body Size		 Connection Size	 Female	 Male
	Type "C" Manual Sleeve	1/4	CL4C4F	CL4C4M
			Type "P" Zinc Plated Hardened Steel	1/4
Plug Type				



	"K" Automatic Ultra-Flo
Front Body	Nickel Plated Brass
Back Body	Nickel Plated Brass
Sleeve	Nickel Plated Hardened Steel
Valve	Brass
Springs	AISI 301 Stainless Steel
Locking System	AISI 420 Stainless Steel Balls
Seal	Buna-N
Working Temperature	-4° F to +210° F
Maximum Pressure	500 PSI
Connecting Force At 90 PSI	33.7 Lbs.

Type "CB" High Flow Safety Lock Couplers & Plugs


Series "CB4" 1/4" Body Size		Connection Size	Female	Male	Hose Barb
Coupler Type					
	Type "K" Automatic Ultra-Flo	1/4	CB4K4F	CB4K4M	CB4K4B
		5/16			CB4K5B
		3/8	CB4K6F	CB4K6M	CB4K6B
		1/2	CB4K8F	CB4K8M	CB4K8B
Plug Type		Connection Size	Female	Male	Hose Barb
	Type "P" Nickel Plated Hardened Steel	1/8		CB4P2M	
		1/4	CB4P4F	CB4P4M	CB4P4B
		5/16			CB4P5B
		3/8	CB4P6F	CB4P6M	CB4P6B
		1/2	CB4P8F	CB4P8M	CB4P8B
	Type "N" Nickel Plated Brass	1/4		CB4N4M	
		5/16			CB4N5B
		3/8			CB4N6B
		1/2		CB4N8M	



	"K" Automatic Locking Ball	"S" Automatic Locking Pin
Front Body	Brass	Brass
Back Body	Brass	Brass
Sleeve	Brass	Brass
Valve	Brass	Brass
Springs	AISI 301 Stainless Steel	AISI 303 Stainless Steel
Locking System	AISI 420 Stainless Steel Balls	AISI 420 Stainless Steel Pins
Seal	Buna-N	Buna-N
Working Temperature	-4° F to +210° F	-4° F to +210° F
Maximum Pressure	500 PSI	500 PSI
Connecting Force At 90 PSI	13.5 Lbs.	17.9 Lbs.

Type "CM" Miniature Couplers & Plugs

Series "CM2" 1/8" Body Size Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb	Tubing Connection
 Type "K" Automatic Locking Ball	1/8		CM2K2F	CM2K2M			
	5/32				CM2KFB		
	3/16				CM2K3B		
	1/4	CM2K4F	CM2K4M	CM2K4B	CM2K4L		
	5/16			CM2K5B			
	3/8	CM2K6F	CM2K6M	CM2K6B			
	1/4 x 5/32						CM2K4T
	5/16 x 1/4						CM2K5T
 Type "S" Automatic Locking Pin	1/8		CM2S2F	CM2S2M			
	5/32				CM2SFB		
	1/4	CM2S4F	CM2S4M	CM2S4B			
	5/16			CM2S5B			
	3/8	CM2S6F	CM2S6M	CM2S6B			
Plug Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb	Tubing Connection
 Type "N" Brass	1/8		CM2N2F	CM2N2M			
	5/32				CM2NFB		
	3/16				CM2N3B		
	1/4	CM2N4F	CM2N4M	CM2N4B	CM2N4L		
	5/16			CM2N5B			
	3/8		CM2N6M	CM2N6B			
	1/4 x 5/32						CM2N4T
5/16 x 1/4						CM2N5T	

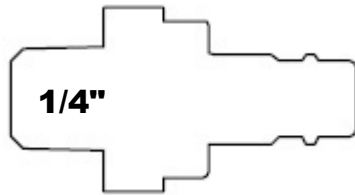

	"K" Automatic Ultra-Flo
Front Body	Brass
Back Body	Brass
Sleeve	Brass
Valve	Brass
Springs	AISI 301 Stainless Steel
Locking System	AISI 420 Stainless Steel Balls
Seal	Buna-N
Working Temperature	-4° F to +210° F
Maximum Pressure	500 PSI
Connecting Force At 90 PSI	26.9 Lbs.

Type "DE" High Flow Double Shut-Off Couplers & Plugs

Series "DE4" 1/4" Body Size		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
 Type "K" Automatic Ultra-Flo	Coupler Type	1/4	DE4K4F	DE4K4M	DE4K4B	DE4K4L
		5/16			DE4K5B	
		3/8	DE4K6F	DE4K6M	DE4K6B	DE4K6L
		1/2	DE4K8F	DE4K8M	DE4K8B	DE4K8L
 Type "N" Brass	Plug Type	Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb
		1/8		DE4N2M		
		1/4	DE4N4F	DE4N4M	DE4N4B	DE4N4L
		5/16			DE4N5B	
		3/8	DE4N6F	DE4N6M	DE4N6B	DE4N6L
1/2	DE4N8F	DE4N8M	DE4N8B	DE4N8L		



	"K" Automatic Ultra-Flo
Front Body	Brass
Back Body	Brass
Sleeve	Brass
Valve	Brass
Springs	AISI 301 Stainless Steel
Locking System	AISI 420 Stainless Steel Balls
Seal	Buna-N
Working Temperature	-4° F to +210° F
Maximum Pressure	500 PSI
Connecting Force At 90 PSI	13.5 Lbs.


Type "DM" Miniature Couplers & Plugs

Series "DM2" 1/8" Body Size Coupler Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb	Tubing Connection
<p>Type "K" Automatic Locking Ball</p>	1/8		DM2K2F	DM2K2M			
	5/32				DM2KFB		
	3/16				DM2K3B		
	1/4		DM2K4F	DM2K4M	DM2K4B	DM2K4L	
	5/16				DM2K5B		
	3/8		DM2K6F	DM2K6M	DM2K6B		
	1/4 x 5/32						DM2K4T
	5/16 x 1/4						DM2K5T
Plug Type		Connection Size	Female	Male	Hose Barb	Push-Lock Hose Barb	Tubing Connection
<p>Type "N" Brass</p>	1/8		DM2N2F	DM2N2M			
	5/32				DM2NFB		
	3/16				DM2N3B		
	1/4		DM2N4F	DM2N4M	DM2N4B	DM2N4L	
	5/16				DM2N5B		
	3/8			DM2N6M	DM2N6B		
	1/4 x 5/32						DM2N4T
	5/16 x 1/4						DM2N5T

Body Size	1/4"	3/8"
Rated Pressure	300	300
Temperature Range (°F)	0 to 160	0 to 160
Vacuum Service	Not Recommended	


Industrial Interchange

Female Pipe Thread



Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PBH-251-4FP	1/4-18	2.60	0.67	1.19	0.13
1/4	PBH-251-6FP	3/8-18	2.67	0.91	1.19	0.15
3/8	PBH-371-4FP	1/4-18	2.95	0.67	1.38	0.21
3/8	PBH-371-6FP	3/8-18	2.95	0.83	1.38	0.20
3/8	PBH-371-8FP	1/2-14	3.17	0.99	1.38	0.22


Male Pipe Thread



Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PBH-251-4MP	1/4-18	2.97	0.67	1.19	0.14
1/4	PBH-251-6MP	3/8-18	2.99	0.91	1.19	0.19
3/8	PBH-371-4MP	1/4-18	3.39	0.83	1.38	0.23
3/8	PBH-371-6MP	3/8-18	3.39	0.83	1.38	0.23


RF Interchange

Female Pipe Thread



Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PER-251-4FP	1/4-18	2.83	0.83	1.25	0.17
1/4	PER-251-6FP	3/8-18	2.83	0.83	1.25	0.15

Male Pipe Thread




Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PER-251-4MP	1/4-18	2.36	0.83	1.25	0.19
1/4	PER-251-6MP	3/8-18	2.40	0.83	1.25	0.18

EXHAUST

Body Size	1/4"	3/8"	1/2"
Rated Pressure	300	300	300
Temperature Range (°F)	0 to 160	0 to 160	0 to 160
Vacuum Service	Not Recommended		


Exhaust Industrial Interchange

Female Pipe Thread



Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PBS-251-4FP	1/4-18	2.60	0.67	1.19	0.13
1/4	PBS-251-6FP	3/8-18	2.67	0.91	1.19	0.15
3/8	PBS-371-6FP	3/8-18	2.95	0.82	1.38	0.20
3/8	PBS-371-8FP	1/2-14	3.17	0.99	1.38	0.22
1/2	PBS-501-6FP	3/8-18	3.17	1.18	1.62	0.50
1/2	PBS-501-8FP	1/2-14	3.36	1.18	1.62	0.50
1/2	PBS-501-12FP	3/4-14	3.66	1.18	1.62	0.50


Male Pipe Thread



Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PBS-251-4MP	1/4-18	2.97	0.67	1.19	0.14
1/4	PBS-251-6MP	3/8-18	2.99	0.91	1.19	0.19
3/8	PBS-371-6MP	3/8-18	3.39	0.82	1.38	0.23
3/8	PBS-371-8MP	1/2-18	3.39	0.91	1.38	0.28
1/2	PBS-501-8MP	3/8-18	3.70	1.18	1.62	0.50


Exhaust RF Interchange

Female Pipe Thread



Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PBS-251-6FP	3/8-18	2.83	0.83	1.25	0.15

Male Pipe Thread




Body Size (in.)	Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
			A	B	C	
1/4	PES-251-4MP	1/4-18	2.36	0.83	1.25	0.19

EXHAUST


Body Size (in.)	1/4	3/8	1/2	3/4
Rated Pressure (PSI)	300	300	300	300
Temperature Range (std seals)	-40° to +250° F.			
Locking Device	4 balls	4 balls	6 balls	8 balls
Force required to Connect (lbs)	Less than 10			
Vacuum Service	Not recommended			

Female Pipe Thread




Body Size (in.)	New Part No.	Old Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
				A	B	C	
1/4	EZ-251-4FP	EZ304F-4T	1/4-18	2.25	0.75	1.00	0.25
1/4	EZ-251-6FP	EZ304F-6T	3/8-18	2.68	0.88	1.01	0.29
3/8	EZ-371-6FP	EZ306F-6T	3/8-18	2.53	0.88	1.18	0.38
3/8	EZ-371-8FP	EZ306F-8T	1/2-14	3.00	1.12	1.30	0.50
1/2	EZ-501-8FP	EZ308F-8T	1/2-14	3.01	1.12	1.38	0.65
1/2	EZ-501-12FP	EZ308F-12T	3/4-14	3.44	1.38	1.59	0.70
3/4	EZ-751-12FP	EZ312F-12T	3/4-14	3.01	1.38	1.57	0.76
3/4	EZ-751-16FP	EZ312F-16T	1-11 1/2	3.52	1.56	1.80	0.92

Male Pipe Thread




Body Size (in.)	New Part No.	Old Part No.	Thread Size NPTF	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
				A	B	C	
1/4	EZ-251-4MP	EZ304F-4T	1/4-18	2.85	0.75	1.00	0.30
1/4	EZ-251-6MP	EZ304F-6T	3/8-18	2.87	0.75	1.00	0.31
3/8	EZ-371-6MP	EZ306F-6T	3/8-18	3.10	0.88	1.18	0.44
1/2	EZ-501-8MP	EZ308F-8T	1/2-14	3.62	1.12	1.38	0.73
3/4	EZ-751-12MP	EZ312F-12T	3/4-14	3.70	1.38	1.57	0.90

Standard Hose Barb



Body Size (in.)	New Part No.	Old Part No.	Hose I.D.	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
				A	B	C	
1/4	EZ-251-4HB	EZ304HB-4T	1/4	3.20	0.75	1.00	0.28
1/4	EZ-251-6HB	EZ304HB-6T	3/8	3.20	0.75	1.00	0.29
3/8	EZ-371-6HB	EZ306HB-6T	3/8	3.43	0.88	1.18	0.42
1/2	EZ-501-8HB	EZ308HB-8T	1/2	4.06	1.12	1.40	0.70

Push-Lok Hose Barb*



Body Size (in.)	New Part No.	Old Part No.	Hose I.D.	Overall Length	Hex Size	Largest Diameter	Wt. (lb) P/Piece
				A	B	C	
1/4	EZ-251-4PL	EZ304PL-4T	1/4	3.03	0.75	1.00	0.28
1/4	EZ-251-6PL	EZ304PL-6T	3/8	3.18	0.75	1.00	0.29
3/8	EZ-371-6PL	EZ306PL-6T	3/8	3.38	0.88	1.18	0.42
1/2	EZ-501-8PL	EZ308PL-8T	1/2	3.91	1.12	1.38	0.70

* Push-Lok hose barbs are designed for use with Parker Push-Lok hose and do not require clamps.