

Condensed Reel Catalog

Our best-selling hose, cord and cable reels



reelcraft.com



Why use hose reels?

Why use hose reels? Because they make hose handling more efficient and safer. Your hoses, cables and cords will last up to five times longer. You will improve hose management, which decreases labor costs. Your chances of injuries from tripping

hazards will decrease, which saves lost work time, medical bills and higher insurance. You also save the expense and time to replace expensive hoses, cables and cords that get run over by fork lifts and other vehicles.

Truck courtesy of E&B Paving, Anderson IN



OSHA says reduce your trips and falls

"There are many situations that may cause slips, trips and falls. The controls needed to prevent these hazards are usually obvious, but too often ignored, such as... coiling up extension cords, lines and hoses when not in use and keeping electrical and other wires out of the

way." OSHA's "Fall Prevention Tips" include, "Practice good housekeeping. Keep cords, welding leads and air hoses out of walkways or adjacent work areas.

Source: www.osha.gov

Five reasons why hose reels add value



Improve efficiency
Hoses, cable and cords are where you want/need them.



Increase safety
Reduce tripping accidents and lost work time.



Minimize leakages
Reduce costs of air and water leakages.



Reduce hose wear
Hose and cords on reels can last up to five times longer.



Increase productivity
No more tangled hoses improves efficiency.

Custom Built Reels

Reelcraft's engineered products group custom builds reels to your specifications. Our special engineered products are developed for


demanding applications in areas such as marine, military, aviation, hydroseeding, sewer and well cleaning, offshore oil rigs, robotic cable and much more. We offer flexibility, competitive pricing and a lasting commitment

to excellence. For more than 20 years, Reelcraft's engineered products group has produced custom products to meet individualized requirements.

Galvanized finish ▶



Hydroseed Reels ▶



Sewer/Jetter Reels ▶



Marine Grade Epoxy ▶



Two Year Limited Warranty

Reelcraft now offers a two-year limited warranty. All products manufactured by Reelcraft Industries, Inc. are warranted to be free of defects due to faulty material or workmanship for 24 months from date of shipment, except hose. Normal wear and tear is not considered a defect in material or workmanship.

NOTE: For complete warranty information, online warranty registration, service manuals, and return information please visit www.reelcraft.com.

Front Cover: L-R: Series 7000/80000 lube reels; Series TW7000; Series 4000, photo courtesy of V.T. Leebooy, Inc.

Back Cover: L-R: Series 30000, photo courtesy of Zedos United, Singapore; Series DP7000; Nordic Series Large Frame Reels.

Same-day quick ship program offers fastest service

Because we are centrally located in the US and have three North American warehouses, upon request, we can quickly ship our standard products the same day for domestic orders of five or fewer standard models. Orders must be received by 11:30 am local time. Look for the shipping icons in this catalog for designated models. For the most current list of Quick Ship reels, please visit www.reelcraft.com.



Located in Northeast Indiana since 1971, Reelcraft's global headquarters' office and manufacturing space is a state-of-the-art 130,000 square foot facility.

North America: **800-444-3134**
Europe: **+44 (0) 1536 406999**

China: **+86 (519) 8512 2391**
Pacific Rim: **+63 (45) 625-6624**
Latin America: **001-60-489-1685**

reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

 Indiana Warehouse
 Indiana & California Warehouses
 California Warehouse
 Canadian Warehouse
 Canadian Warehouse

Series DP7000



Reelcraft: Better by Design

Reelcraft's reels are better by design because of our lasting commitment to excellence. Our engineering team is well known for designing durable, high quality products. Our standard features include durable, corrosion-resistant

powder coat paint, multi-position guide arms for versatile mounting options and heavy-duty, reinforced steel stampings for increased strength. Our reels are permanently factory-lubricated for a long, trouble-free

service life. All of these features, and many more, add up to make "The Reelcraft Difference."

Reinforced Steel

The steel-stamped guide arm is reinforced to reduce bending due to angular pull.

Improved Connection

The elongated brass connector and proprietary adhesion process provide a better crimp to the hose.

Stress-free Swivel

Our full-flow design combines the highest grade seal design with supporting bearing surfaces to insure the longest possible life.

Corrosion-Resistant

Steel components are individually powder coated to virtually eliminate corrosion.

Long Service Life

Field-proven swivel assures long service life.

Kinkless Hose

High quality PVC hose is specially blended for use on reels

Sealed Connection Points

Swivel and hose inlet connections seal against leaks

Adjustable Guide Arm

Multiple guide arm positions provide versatile uses and easier field adjustment

Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance

Long Life Drive Spring

Drive mechanism is enclosed for protection against the environment. Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.

Robust Latch

Wide profile combined with special spring assures maximum service life.

Structural Strength


Welded heavy gauge steel frame includes dramatically flanged edges and stiffening ribs for lighter weight, yet stronger components for ease of handling and installation.

Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

Finish with Quality

Our components undergo a special five-stage cleaning process and are individually powder-coated for the highest quality paint adhesion. Excess powder is reclaimed to be environmentally friendly.

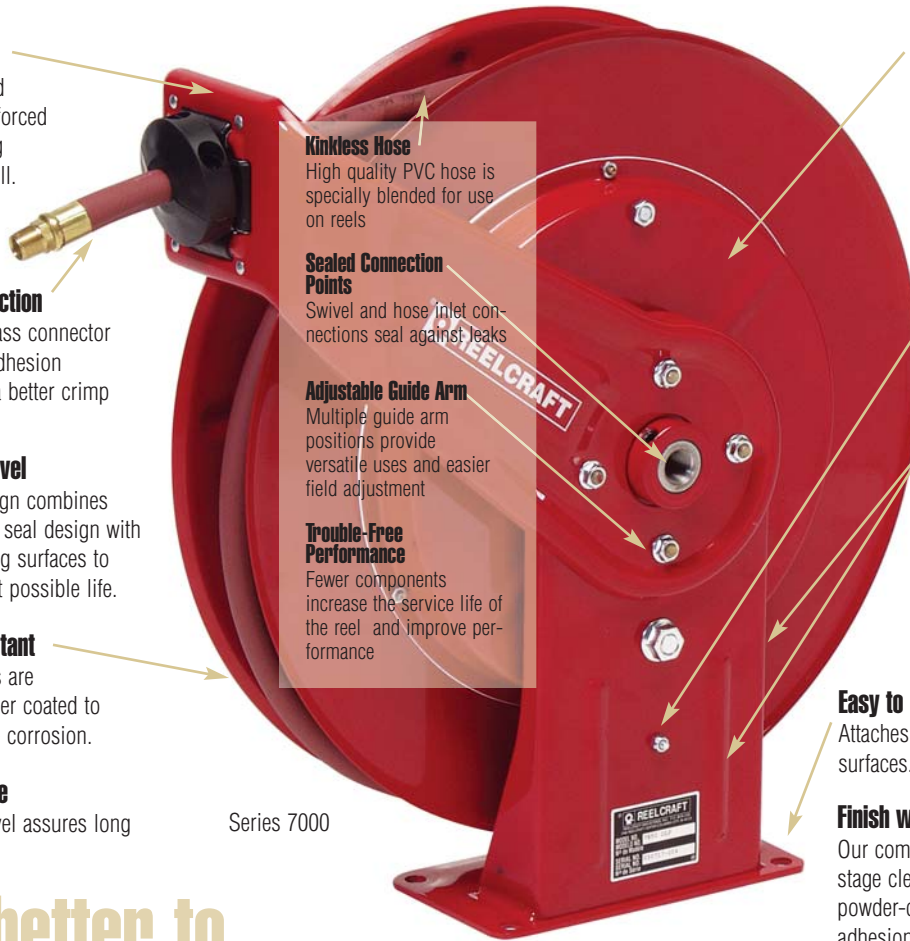

Series 7000

Shown: 7850 OLP

Built better to perform better™

To place an order, please advise:

1. Model number.
2. Product to be handled such as air, oil, water, etc.
3. Maximum operating pressure in P.S.I.
4. Maximum operating temperature in degrees Fahrenheit.
5. Hose inside and outside diameters and length.
6. Installation height, especially if more than 16 feet.
7. Desired guide arm position by adding one of the suffixes to the model number. Example: 5635 OLP SW for side wind. Refer to the guide arm chart for guide arm suffix codes.

Additional Considerations:

A flexible connection between the reel and the source of supply is required to prevent possible misalignment and binding. Non-flexible connections will void the warranty. The pressure rating of inlet hose must be equal or greater than the rating of the reel.

Accessories

Reels ordered with hose and bumper are assembled complete and ready to install. Order bumpers separately for reels without hoses.

Additional questions? Please visit our website or call for assistance. For more than 30 years, our specialty is offering hose handling solutions.

COPYRIGHT, REELCRAFT INDUSTRIES, INC. 2009
All rights reserved. No part of the material protected by this copyright may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, recording, broadcasting or by any other information storage and retrieval

system without written permission from Reelcraft Industries, Inc. Reelcraft, Work Smarter, Nordic, Hose Boss, Safe-T-Reel, Better by Design, Built Better to Perform Better and Rely on Reelcraft are the trademarks and service marks of Reelcraft Industries, Inc. registered in the United States and/or other jurisdictions. You shall

not display, disparage, dilute or taint our trademarks and service marks or use any confusingly similar marks, or use our marks in such a way that would misrepresent the identity of the owner. Any permitted use of our trademarks and service marks inures to the benefit of Reelcraft Industries, Inc.

All other trademarks, service marks or registered trademarks appearing on these pages are the trademarks or service marks of their respective owners. Super Swivel, Full Circle swivel, Viton, Buna, Push Lok and Pos-i-Latch are not owned by Reelcraft Industries, Inc.

North America: **800-444-3134**
Europe: **+44 (0) 1536 406999**
reelcraft.com

China: **+86 (519) 8512 2391**
Pacific Rim: **+63 (45) 625-6624**
Latin America: **001-60-489-1685**





Medium Duty Spring Retractable Reels

Series RT

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a composite spool for longer service life. Guide arm adjusts to seven positions.

Series RT
Made in USA



RT650-OLP
Patent No. 7,150,425

MEDIUM DUTY SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
				Maximum Temperature 150° F (65° C)			LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS										
RT435-OLP	RT403-OLP	1/4	35	300	1/4	3/8	16.5	5.75	17.625	22
RT450-OLP	RT405-OLP	1/4	50	300	1/4	3/8	16.5	5.75	17.625	25
RT635-OLP	RT603-OLP	3/8	35	300	1/4	3/8	16.5	5.75	17.625	23
RT650-OLP	RT605-OLP	3/8	50	300	1/4	1/2	16.5	6.25	17.625	29
RT835-OLP	RT803-OLP	1/2	35	300	1/2	1/2	16.5	6.25	17.625	30
RT850-OLP	RT805-OLP	1/2	50	300	1/2	1/2	16.5	7.75	17.625	35
MEDIUM PRESSURE OIL REELS										
		Maximum Temperature 150° F (65° C)								
RT635-OMP	RT603-OMP	3/8	35	1000	3/8	3/8	16.5	5.75	17.625	30
RT835-OMP	RT803-OMP	1/2	35	1000	1/2	1/2	16.5	6.25	17.625	33
HIGH PRESSURE GREASE REELS										
		Maximum Temperature 150° F (65° C)								
RT435-OHP	RT403-OHP	1/4	35	5000	1/4	3/8	16.5	5.75	17.625	31
RT635-OHP	RT603-OHP	3/8	35	4000	3/8	1/2	16.5	6.25	17.625	34
RT650-OHP	RT605-OHP	3/8	50	4000	3/8	1/2	16.5	7.75	17.625	39

*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

Premium Duty Spring Retractable Reels

Made in USA

Series 4000, 5000 & 5005

Series 4000, 5000 & 5005 reels are durable and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. The Series 5005 reel can handle hose lengths up to 50 feet. Reels are all-steel construction and compact for different applications. Guide arm adjusts to two positions. Consult Reelcraft for other products and hoses.



4625 OLP

5635 OLP

A5850 OLP

PREMIUM DUTY SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
				Maximum Temperature 150° F (65° C)			LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS										
4425 OLP	4400 OLP	1/4	25	300	1/4	3/8	12.625	5.375	12.875	19
4435 OLP	4400 OLP	1/4	35	300	1/4	3/8	12.625	5.375	12.875	20
5450 OLP	5400 OLP	1/4	50	300	1/4	3/8	13.5	6	14.5	26
4625 OLP	4600 OLP	3/8	25	300	1/4	3/8	12.625	5.375	12.875	22
5635 OLP	5600 OLP	3/8	35	300	1/4	3/8	13.5	6	14.5	25
5650 OLP	5605 OLP	3/8	50	300	1/4	3/8	16.5	6	17.5	37
A5825 OLP	A5800 OLP	1/2	25	300	1/2	3/8	13.5	6	14.5	34
A5835 OLP	A5805 OLP	1/2	35	300	3/8	3/8	16.5	6	17.5	38
A5850 OLP	A5806 OLP	1/2	50	300	1/2	3/8	16.5	7	17.5	44
MEDIUM PRESSURE OIL REELS										
		Maximum Temperature 210° F (99° C)								
5435 OMP	5400 OMP	1/4	35	2750	1/4	3/8	13.5	6	14.5	31
5630 OMP	5600 OMP	3/8	30	2250	3/8	3/8	13.5	6	14.5	33
A5835 OMP	A5805 OMP	1/2	35	2000	1/2	3/8	16.5	6	17.5	34
HIGH PRESSURE GREASE REELS										
		Maximum Temperature 210° F (99° C)								
5435 OHP	5405 OHP	1/4	35	5000	1/4	1/4	16.5	6	17.5	42
5625 OHP	5600 OHP	3/8	25	4000	1/4	1/4	13.5	6	14.5	31

*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle.


North America: **800-444-3134**
Europe: **+44 (0) 1536 406999**

China: **+86 (519) 8512 2391**
Pacific Rim: **+63 (45) 625-6624**
Latin America: **001-60-489-1685**

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse
 California Warehouse
 Indiana & California Warehouses
 Canadian Warehouse

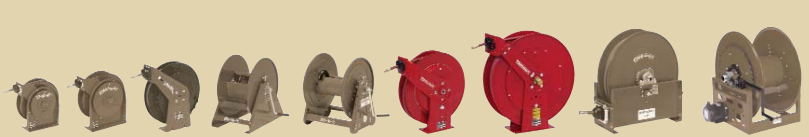

Heavy Duty Spring Retractable Reels Series 7000

Reelcraft's popular Series 7000 is ideal for the most demanding industrial and commercial applications. The reel's base and guide arms are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The Series 7000 incorporates all steel construction and a baked-on powder coat finish to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.



7850 OLP

Made in USA

HEAVY DUTY INDUSTRIAL SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)										
7650 OLP	7600 OLP	3/8	50	300	1/4	1/2	19	7	20.25	47
7670 OLP	7600 OLP	3/8	70	300	1/4	1/2	19	7	20.25	50
7850 OLP	7800 OLP	1/2	50	300	3/8	1/2	19	7	20.25	51
7925 OLP	7900 OLP	3/4	25	250	3/4	3/4	19	7	20.25	49
MEDIUM PRESSURE OIL REELS Maximum Temperature 210° F (99° C)										
7850 OMP	7800 OMP	1/2	50	2000	1/2	1/2	19	7	20.25	57
HIGH PRESSURE GREASE REELS Maximum Temperature 210° F (99° C)										
7650 OHP	7600 OHP	3/8	50	4000	1/4	1/2	19	7	20.25	60

*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle.

Heavy Duty Dual Pedestal Spring Retractable Reels

Series DP5000, DP7000 & 80000

Reelcraft's new compact DP5000 and DP7000 series features our innovative interlocking base design, which makes the base assembly especially strong and resistant to vibration. The base and guide arm on all dual pedestal reels is structurally reinforced.

NEW!

DP7850 OLP
Patent Pending

Made in USA



82100 OLP

DUAL PEDESTAL REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)										
DP5435 OLP	DP5400 OLP	1/4	35	300	1/4	1/2	14	8	16	32
DP5450 OLP	DP5400 OLP	1/4	50	300	1/4	1/2	14	9	16	35
DP7450 OLP	DP7400 OLP	1/4	50	300	1/4	1/2	16.5	8	17	46
DP5635 OLP	DP5600 OLP	3/8	35	300	1/4	1/2	14	8	16	34
DP5650 OLP	DP5600 OLP	3/8	50	300	1/4	1/2	14	9	16	36
DP7650 OLP	DP7600 OLP	3/8	50	300	1/4	1/2	16.5	8	17	47
81100 OLP	81000 OLP	3/8	100	300	3/8	1/2	24	10.5	25.375	92
DP5835 OLP	DP5800 OLP	1/2	35	300	3/8	1/2	14	9	16	40
DP7850 OLP	DP7800 OLP	1/2	50	300	3/8	1/2	16.5	9	17	50
82075 OLP	82000 OLP	1/2	75	300	1/2	1/2	24	10.5	25.375	95
82100 OLP	82000 OLP	1/2	100	300	1/2	1/2	24	10.5	25.375	101
83050 OLP	83000 OLP	3/4	50	250	3/4	3/4	24	10.5	25.375	88
D83075 OLP	D83000 OLP	3/4	75	250	3/4	3/4	24	14.25	25.375	96
D84050 OLP	D84000 OLP	1	50	250	3/4	1	24	14.25	25.375	110
MEDIUM PRESSURE OIL REELS Maximum Temperature 210° F (99° C)										
DP7650 OMP	DP7600 OMP	3/8	50	2250	3/8	1/2	16.5	8	17	55
DP5835 OMP	DP5800 OMP	1/2	35	2000	1/2	1/2	14	9	16	43
DP7850 OMP	DP7800 OMP	1/2	50	2000	1/2	1/2	16.5	9	17	57
82075 OMP	82000 OMP	1/2	75	1500	1/2	1/2	24	10.5	25.375	101
83050 OMP	83000 OMP	3/4	50	1250	3/4	3/4	24	10.5	25.375	96
HIGH PRESSURE GREASE REELS Maximum Temperature 210° F (99° C)										
DP7450 OHP	DP7400 OHP	1/4	50	5000	1/4	1/2	16.5	8	17	57
DP5635 OHP	DP5600 OHP	3/8	35	4000	1/4	1/2	14.375	9	16.375	43
DP7650 OHP	DP7600 OHP	3/8	50	4000	1/4	1/2	16.5	8	17	60
81075 OHP	81000 OHP	3/8	75	4000	3/8	1/2	24	10.5	25.375	88
81100 OHP	81000 OHP	3/8	100	4000	3/8	1/2	24	10.5	25.375	127

*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle.

North America: 800-444-3134

China: +86 (519) 8512 2391

Europe: +44 (0) 1536 406999

Pacific Rim: +63 (45) 625-6624

reelcraft.com

Latin America: 001-60-489-1685





Ultimate Duty Vehicle-Mount Reels

Series D8000 & E9000

The ultra duty aluminum cast base and arm of the Series D8000 offers the highest rigidity among this class of hose reels. D8000 guide arms are field-adjustable for floor, wall, ceiling, pit and truck mounting. Series E9000 reels offer the greatest amount of stability for high volume air or water. Fuel and petroleum models are listed below and are ideal for portable service trucks, permanent service or plant work areas. The durable baked-on, powder-coat finish provides a high quality ultra-violet radiation (sunlight) weather and chip-resistant finish that will stay bright through years of use.



D8650 OLP



E9350 OLPBW

Made in USA

ULTIMATE DUTY / FLOOR / TRUCK MOUNT SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)										
D8650 OLP	D8600 OLP	3/8	50	300	1/4	1/2	19	9.25	21.25	48
D8850 OLP	D8800 OLP	1/2	50	300	3/8	1/2	19	9.25	21.25	52
E9299 OLPBW	E9200 OLPBW	1/2	100	300	1/2	1/2	26.25	15.75	26.25	127
E9350 OLPBW	E9300 OLPBW	3/4	50	250	3/4	3/4	26.25	15.75	26.25	140
E9375 OLPBW	E9300 OLPBW	3/4	75	250	3/4	3/4	26.25	15.75	26.25	152
D9399 OLPBW	D9305 OLPBW	3/4	100	250	3/4	3/4	26.25	15.75	26.25	143
E9450 OLPBW	E9400 OLPBW	1	50	250	3/4	1	26.25	15.75	26.25	157

*Weight of model with hose. Medium and high pressure styles available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing

Static Discharge/Grounding Reels Series G

Static discharge reels are used to ground equipment operating in hazardous atmospheres, such as fuel trucks or carts transferring flammable materials. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reduces chances of sparking and the potential for explosion.



G 3050 Y 50' Cable

G 3050 50' Cable

GROUNDING REELS: SPRING RETRACTABLE

MODEL	CABLE LENGTH (ft)	DESCRIPTION	DIMENSIONS (in)			SHPG. WT. (lbs)
			LENGTH	WIDTH	HEIGHT	
G 3050	50	Single 7 x 7 strand steel cable	8.62	3.35	8.81	12
G 3050 N	50	Nylon covered cable	8.62	3.35	8.81	12
G 3050 Y	50	Steel cable splits in 2 @ 15ft	8.62	3.35	8.81	12
GA3100 N	100	Nylon covered cable	9.25	4.31	9.75	22

Fuel Delivery Reels

Made in USA

Series F7000, FD9000, F80000, FD80000

Reelcraft's spring retractable fuel delivery reels, equipped with Viton® seals, incorporate metal forms to insure the greatest possible strength and are ideal for mobile applications. These rugged, corrosion-resistant reels are suitable for a wide variety of fuel applications. Series FD80000 reels are also supplied with our new ball-bearing style swivel.



FD9350 OLPBW

FD83075 OLP

FUEL REELS: SPRING RETRACTABLE

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE FUEL REELS Maximum Temperature 150° F (65° C) with hose or 210° (99° C) without hose.										
F7925 OLP	F7900 OLP	3/4	25	**50	3/4	3/4	19	7	20.25	53
F83050 OLP	F83000 OLP	3/4	50	**50	3/4	3/4	24	10.5	25.375	89
FD83075 OLP	FD83000 OLP	3/4	75	**50	3/4	3/4	24	14.25	25.375	130
FD84050 OLP	FD84000 OLP	1	50	**50	1	1	24	14.25	25.375	120
FD9350 OLPBW	FD9300 OLPBW	3/4	50	**50	3/4	3/4	26.25	15.75	26.25	140
FD9450 OLPBW	FD9400 OLPBW	1	50	**50	1	1	26.25	15.75	26.25	157

*Weight of model with hose. **Models equipped with fuel grade hose. UL330 and ULC approved hose. 250 PSI minimum burst. Note: Images of each series not shown above. See page 5 for 7000 & 9000 images.

North America: 800-444-3134
Europe: +44 (0) 1536 406999

China: +86 (519) 8512 2391
Pacific Rim: +63 (45) 625-6624
Latin America: 001-60-489-1685

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse
 California Warehouse
 Indiana & California Warehouses
 Canadian Warehouse



Light Duty Hand Crank Reels

Light duty, hand-crank hose reels are an economical choice for storing and retrieving infrequently-used hose when not in use. Hose not included.

NEW!



CU6100LN

LIGHT INDUSTRIAL HAND CRANK REELS

MODEL NO.	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)
						LENGTH	WIDTH	HEIGHT	
CU6050LN	3/8	50	250	3/8	3/8	16.75	10.5	11.5	10
CU6100LN	3/8	100	250	3/8	3/8	21.125	10.5	11.5	13




Medium/Heavy Duty for Long Hose Lengths Series H and Series 30000

For applications requiring long lengths of hose, Series H is for medium duty use and Series 30000 is for heavy duty use. Series 30000 reels feature vibration-proof, self-locking fasteners and are ideal for industrial or field use such as turf care or pest control.

Made in USA

EA33112 L12D

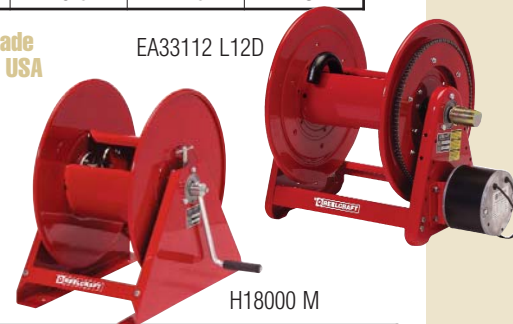

H18000 M

MEDIUM AND HEAVY DUTY HAND CRANK AND MOTOR DRIVEN REELS

MODEL	HOSE I.D. (in.)	HOSE CAPACITY (ft.)	MAX PSI	(F) NPTF REEL OUTLET (in.)	(F) NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)	
						LENGTH	WIDTH	HEIGHT		
PREMIUM HAND CRANK REELS										
H18000 M	1/2	200	1000	1/2	1/2	20	18.25	19	33	
H29000 M	3/4	150	1000	3/4	3/4	20	24.25	19	41	
HEAVY DUTY HAND CRANK REELS										
CA32106 L	1/2	100	1000	1/2	1/2	19	17.75	20.25	42	
CA32112 L	1/2	200	1000	1/2	1/2	25	17.75	20.25	49	
CA33106 L	3/4	50	1000	3/4	3/4	19	17.75	20.25	43	
CA33112 L	3/4	100	1000	3/4	3/4	25	17.75	20.25	47	
CA33118 L	3/4	175	1000	3/4	3/4	31	17.75	20.25	56	
CA37118 L	1	100	300	1	1	31	17.75	20.25	57	
CA32112 M	1/2	200	3000	1/2	1/2	25	17.75	20.25	49	
CA33112 M	3/4	100	3000	3/4	3/4	25	17.75	20.25	53	
MOTOR DRIVEN REELS - 12VDC (24 VDC, 115 VAC and air motors available as standard) Series 30000 available with pneumatic and hydraulic motor.										
EA32118 L12D	1/2	325	1000	1/2	1/2	31.25	17.75	20.25	71	
EA33112 L12D	3/4	100	1000	3/4	3/4	25.25	17.75	20.25	70	

Hose not included. Many sizes not listed available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

Heavy Duty Pressure Wash Reels

Series 30000, H18006 & PW

Compact design and quality steel construction are incorporated into Reelcraft's newest line of pressure wash reels. The Series H18006 and PW reels are able to carry 100 to 400 feet of hose and are complete with a high pressure swivel for maximum product delivery. The swivel is designed to handle a broad range of pressures, temperatures and chemicals; perfect for agriculture/marine, equipment cleaning and pressure washing applications.

Made in USA



PW81000 OHP
*Hose not included

PRESSURE WASH REELS: HAND CRANK AND SPRING RETRACTABLE

MODEL	HOSE I.D. (in)	HOSE CAPACITY(ft)	MAX PSI	(F) NPTF REEL OUTLET (in)	(F) NPTF REEL INLET (in)	DIMENSIONS (in)			SHPG. WT. (lbs)	
						LENGTH	WIDTH	HEIGHT		
HAND CRANK REELS										
H18006 M*	3/8	100	3000	1/2	1/2	18.25	20	19	31	
CA38106 M*	3/8	140	3000	1/2	1/2	19	17.75	20.25	44	
CA38112 M*	3/8	300	3000	1/2	1/2	25	17.75	20.25	49	
SPRING DRIVEN REELS										
PW7600 OHP*	3/8	50	4500	1/2	1/2	19	7	20.25	46	
PW7650 OHP**	3/8	50	4500	1/4	1/2	19	7	20.25	50	
PW81000 OHP*	3/8	100	4500	3/8	1/2	24	10.5	25.375	81	

*Hose not included. **Hose included with this model.

North America: 800-444-3134

China: +86 (519) 8512 2391

Europe: +44 (0) 1536 406999

Pacific Rim: +63 (45) 625-6624

reelcraft.com

Latin America: 001-60-489-1685





Potable (Drinking Water) and Pre-Rinse Reels Series 5000

Reelcraft's potable (drinking) water reels feature a full-flow stainless steel shaft and PVC swivel and convenient fast hook-up and disconnect. Pre-rinse reels are crafted for use in commercial establishments such as restaurants and institutions. A standard lever-operated spray valve is included. **Made in USA**



5635 OLPSW5

A5835 OLBSW23
Drinking Water Reel (NSF61)

POTABLE & PRE-RINSE REELS: SPRING RETRACTABLE

MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT.
						LENGTH	WIDTH	HEIGHT	
A5835 OLBSW23	1/2	35	150	3/4 Garden Hose (F)	1/2 male	13.75	6	14.5	35
5635 OLPSW5	3/8	35	250	Spray Valve	3/8	13.75	6	14.5	27
5635 ELPSW5	3/8	35	250	Spray Valve	3/8	15	2.5	18.5	39
5635 OLSSW5*	3/8	35	250	Spray Valve	3/8	13.5	6	14.5	29
600248	360° swivel (place between hose and nozzle) on spray valve type								0.5

*Stainless steel reel

Air/Water/Chemical Delivery Reels Series S

The Series S reel is economical, lighter weight and easy to handle. Its technical design and materials meet the demands of a medium-duty industrial grade reel for continuous, trouble-free operation. Made of corrosion-proof, tough polypropylene, extensive tests have shown it to be highly resistant to the vast majority of acids, alkalis and UV rays. The Series S design protects the hose and allows easy cleaning of both hose and reel. Wall or floor mount.

New, improved design!



SGA3650 OLP

SERIES S REELS: SPRING RETRACTABLE

MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)
						LENGTH	WIDTH	HEIGHT	
AIR* & WATER* REELS Working temperature 150° F (65° C).									
SGA3650 OLP	3/8	50	232	3/8	3/8	22.75	9.5	19	23
SGA3665 OLP	3/8	66	232	3/8	3/8	22.75	9.5	19	27
SGA3850 OLP	1/2	50	232	1/2	1/2	22.75	9.5	19	27
WATER REEL Garden-style hose end. Working temperature 150° F (65° C).									
SWA3850 OLP	5/8	50	125	3/4 NH	1/2	22.75	9.5	19	27
HOT WATER WASH REEL Working temperature 185° F (85° C). Working pressure is related to working temperature.									
SHA3850 OLP	1/2	50	232	1/2	1/2	22.75	9.5	19	27
CHEMICAL DELIVERY REEL Working temperature 150° F (65° C).									
SCA3850 OLP	1/2	50	232	1/2	1/2	22.75	9.5	19	27
OXYGEN/ACETYLENE REEL Working temperature 150° F (65° C).									
STW3450 OLP	1/4	50	300	9/16"18(F)LH-RH	9/16"18(F)LH-RH	22.75	11.25	19	27

Hose included. *Air hose can be used for water on these models.

Corrosion-Resistant Reels

Made in USA

Stainless Steel Series

Stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial solvent handling. Also suitable for coastal, offshore and on-board ship in marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels. Swivels include Viton® O-rings.



Series 7000 OLS

Series D9000 OLS

STAINLESS STEEL REELS: SPRING RETRACTABLE

MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)
					LENGTH	WIDTH	HEIGHT	
5600 OLS	3/8	35	500	3/8	13.75	6	14.5	23
7800 OLS	1/2	50	500	1/2	19	7	20.25	44
82000 OLS	1/2	100	500	1/2	24	10.5	25.375	81
D83000 OLS	3/4	75	500	3/4	24.25	14.25	25.375	76
D9300 OLSBW	3/4	75	500	3/4	26.25	12	26.25	116
D84000 OLS	1	50	500	1	24.25	14.25	25.375	77
HS18000 M*	1/2	200	3000	1/2	20	12	19	37

Hose and bumper not included. Latch parts cast of aluminum, all stainless is available except for Series 80000. *Hand crank rewind.

North America: **800-444-3134**
Europe: **+44 (0) 1536 406999**

China: **+86 (519) 8512 2391**
Pacific Rim: **+63 (45) 625-6624**
Latin America: **001-60-489-1685**

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse
 California Warehouse
 Indiana & California Warehouses
 Canadian Warehouse



Series TW7000




Gas Welding Reels

Series TW & BA

Series TW and BA has an independent dual swivel body manufactured from aluminum and hard coated for wear resistance. This unique design assures positive separation of gases. Double-sealed, special molded O-rings prevent leakage. Swivel body and inlet are both permanently identified with machined grooves on the acetylene side to assure proper installation.

Safe-T-Reel Series: Hand Crank

Safe-T-Reels feature a high rigidity due to a one inch shaft with tapered roller bearings. These reels are compact and flexible and made of non-conductive materials.

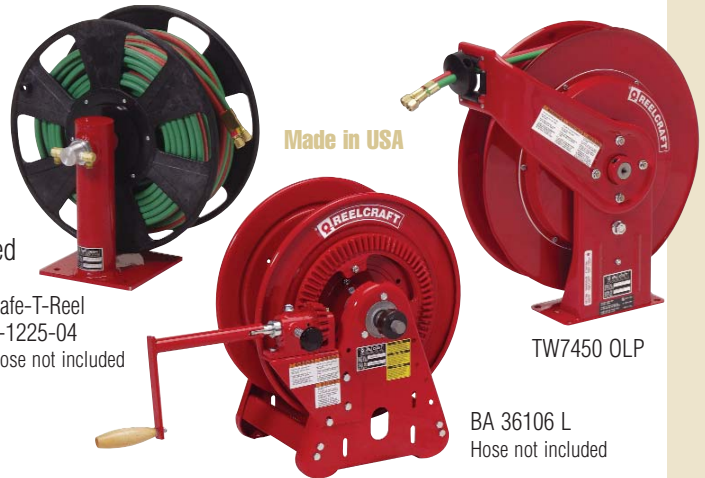

Made in USA

Safe-T-Reel
T-1225-04
Hose not included

TW7450 OLP

BA 36106 L
Hose not included

GAS WELDING REELS: SPRING RETRACTABLE											
MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE CAPACITY (ft)	MAX PSI	HOSE OUTLET(in)	REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)	
							LENGTH	WIDTH	HEIGHT		
TW5425 OLPT	TW5400 OLPT	1/4	25	200	B 9/16-18 (F)	1/4 (F)NPT	13.75	6	14.5	26	
TW7450 OLPT	TW7400 OLPT	1/4	50	200	B 9/16-18 (F)	1/4 (F)NPT	19	7	20.25	53	
TW7460 OLPT	TW7400 OLPT	1/4	60	200	B 9/16-18 (F)	1/4 (F)NPT	19	7	20.25	55	
TW84100 OLPT	TW84000 OLPT	1/4	100	200	B 9/16-18 (F)	B 9/16-18 (M)	24	13	25.375	105	
TW86075 OLPT	TW86000 OLPT	3/8	75	200	B 9/16-18 (F)	B 9/16-18 (M)	24	13	25.375	99	
					REEL OUTLET(in)	REEL INLET (in)					
	BA36106 LT**	1/4	*125	200	B 9/16-18 (M)	1/4 (F)NPT	17.75	16.625	20.625	50	
	BA36112 LT**	1/4	*250	200	B 9/16-18 (M)	1/4 (F)NPT	17.75	22.625	20.625	57	
	T-1225-04**	1/4	*150	200	B 9/16-18 (M)	B 9/16-18 (M)	15.75	18	19	19	

*Weight of model with hose. **Hand crank rewind.

Cable Welding Reels

Series WC & CEA

Series CEA and WC are designed to increase the safety in the work area with a resulting increase in efficiency and productivity. Welding cable reels store work lead or electrode lead, up to #2/0, safely and effectively when not in use. They have a continuous current path through a live 400 AMP, 90VDC (maximum) rated enclosed slip ring.

Safe-T-Reel Series: Hand Crank

Safe-T-Reels are ideal for applications where space, weight and flexibility are key. These reels are designed for manual winding of welding cables. Versatile in function, select configurations to suit specific needs. Safe-T-Reels offer trouble-free management of large capacities of cable. Suitable for outdoor use.



WC7000
Shown with clamp and cable (not included)

Safe-T-Reel T-2462-0

Made in USA

CAUTION:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.

Safe-T-Reel
T-2464-0

CEA30006

CABLE WELDING REELS: HAND CRANK											
MODEL	CABLE CAPACITY (ft.)				AMPS	STYLE	DIMENSIONS (in.)			SHPG. WT. (lbs.)	
	#2	#1	1/0	2/0			LENGTH	WIDTH	HEIGHT		
WC7000	----	50	50	50	400	Spring Drive	19	14.5	20.25	49	
WC80001	----	75	75	75	400	Spring Drive	24	16	25.375	80	
CEA30006*	300	250	200	150	400	Single Hand Crank	19.375	21	20.25	49	
CEA30012*	500	500	400	300	400	Single Hand Crank	19.375	27	20.25	56	
T-1460-0*	----	250	200	200	300	Single Hand Crank	18	15.75	19	22	
T-2462-0*	----	250	200	200	300	Dual Hand Crank/ Side-by-Side	18	29	19	50	
T-2464-0*	----	250	200	200	300	Dual Hand Crank/ Stacked	18	16.25	38	59	

Cable not included. *Hand crank rewind.

North America: 800-444-3134

China: +86 (519) 8512 2391

Europe: +44 (0) 1536 406999

Pacific Rim: +63 (45) 625-6624

reelcraft.com

Latin America: 001-60-489-1685





Dual Hydraulic Spring Retractable Reels

Made in USA

Series TH

Reelcraft's hydraulic reels are used for medium pressure dual hydraulic hose applications and are ideal for operating hydraulic cylinders, tools and equipment. Reelcraft's Series TH reels incorporate contemporary engineering and manufacturing techniques for trouble-free performance. Reels are all steel construction and compact for applications with critical space requirements.



TH88050 OMP

DUAL HYDRAULIC SPRING RETRACTABLE REELS										
MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
TH5425 OMP	TH5400 OMP	1/4	25	2000	1/4	1/4	13.5	6	14.5	34
TH7445 OMP	TH7400 OMP	1/4	45	2000	1/4	1/4	19	7	20.25	67
THA7630 OMP	THA7600 OMP CA	3/8	30	2000	3/8	3/8	19	7	20.25	60
TH86050 OMP	TH86000 OMP	3/8	50	2000	3/8	3/8	24	13	25.375	99
TH88050 OMP	TH88000 OMP CA	1/2	50	2000	1/2	1/2	24	13	25.375	104

*Weight of model with hose.

Modular Large Frame Reels

Series 40 - 1" to 1 1/2" ID; Lengths to 350'

Series 40 large frame reels offer dimensional flexibility. Specify height, width and depth dimensions to fit your space requirements. Custom configurations will be quickly built to your specs. Contact customer service for details on Reelcraft's full range of Series 40 reels.



Series 40

Made in USA

Heavy Duty Large Frame Reels

Nordic Series - 1/2" to 4" ID; Lengths to 700' and more

Reelcraft's Nordic Series reels are rugged and durable, with standard 1/2" pitch chain and sprocket drive powered by AC or DC electric motor with auxillary bevel crank. Nordic reels are equipped with the standard welded frame and heavy duty cast bevel gears for reliable performance. Designs are versatile to provide flexibility to meet user requirements for size, capacity, rewind motor and consistency.



Gear Drive Available

Shown with optional bevel crank Nordic Series 3900

NORDIC SERIES LARGE FRAME REELS: HAND CRANK OR MOTOR DRIVEN							
MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	DIMENSIONS (in.)			SHPG. WT. (lbs.)
				LENGTH	WIDTH*	HEIGHT	
BC2400-21-10-10FF	1	50	1000	21	20	26.5	72
BC2400-25-12-10FF	1	100	1000	25	22	26.5	74
BC2400-25-16-10FF	1	150	1000	25	26	26.5	80
BC2400-25-22-10FF	1	200	1000	25	32	26.5	86
BC3900-25-10-15FF	1 1/2	50	300	25	20	26.5	89
BC3900-25-14-15FF	1 1/2	75	300	25	24	26.5	93
BC3900-31-14-15FF	1 1/2	105	300	31	24	32.5	92
BC3900-31-20-15FF	1 1/2	150	300	31	30	32.5	96
BC3700-25-16-20F2	2	50	300	25	26	26.5	124
BC3700-31-18-20F2	2	100	300	31	28	32.5	124
BC3700-31-24-20F2	2	125	300	31	34	32.5	148
EP5905-39-16-25FI	2 1/2	80	300	39	29	40.5	242
EP5905-39-16-30FI	3	50	300	39	29	40.5	242

*For electric motor versions of the BC models, add 3" to width shown in above chart.

3900-31-12-15FF

Drive Type:
 EP - Electric Motor, 12VDC explosion proof
 BC Bevel Crank (standard)
 Also available, non-explosion proof 12 or 24 DC, explosion proof 115 AC, 24DC. Contact manufacturer.

Tool Balancers

Series TB and TBL

Tool balancers make tools nearly weightless, reducing operator fatigue. Improve safety and ergonomics and help prevent tools from being accidentally dropped, reducing tool damage.



Heavy Duty TBL 10

Medium Duty TB

Tool balancers make tools nearly weightless

TOOL BALANCERS Medium Duty				
MODEL	Min-Max Load (lbs.)	Cable Lgth.	Ratchet Lock	Wgt. (lbs.)
TB 01	0 - 1.5	6'	NO	1
TB 03	1.5 - 3	6'	NO	1
TB 05	3 - 5	6'	NO	1.5

TOOL BALANCERS Heavy Duty				
MODEL	Min-Max Load (lbs.)	Cable Lgth.	Ratchet Lock	Wgt. (lbs.)
TB 10	5 - 10	8'	NO	10
TB 12	8 - 12	8'	NO	10
TB 15	10 - 15	8'	NO	10
TB 23	16 - 23	8'	NO	10
TBL 10	5 - 10	8'	YES	6
TBL 12	8 - 12	8'	YES	7
TBL 15	10 - 15	8'	YES	8
TBL 23	16 - 23	8'	YES	8

North America: 800-444-3134
 Europe: +44 (0) 1536 406999

China: +86 (519) 8512 2391
 Pacific Rim: +63 (45) 625-6624
 Latin America: 001-60-489-1685

Reelcraft Industries is ISO 9001:2000 Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.





Series L5000



Light/Medium Duty Cord Reels

Series LD & LG

Reelcraft's new line of light and medium duty cord reels are designed for less strenuous applications in which a capable and long-lasting reel is required. These reels accommodate lengths of 16/3, 14/3, 12/3, and 10/3 diameter cable.



△ **Light Duty**
LD2040 163 2

△ **Light Duty**
LD2030 163 9

△ **Medium Duty**
LG3050 143 9

△ **Portable power**
LH2080 143

Heavy Duty Cord Reels



Series 4000 & 5000


Series 4000 & 5000 power cord and light reels offer many different styles of outlets and lamps. Easy to mount and structurally strong, the power cord and light reels have robotically welded heavy gauge steel frame that attaches to most structurally sound surfaces.



▷ **Heavy Duty Flying Lead**
L 4050 163 X

△ **Heavy Duty Dual Light/Power**
L 4050 163 8

▷ **Heavy Duty**
L 4050 163 3

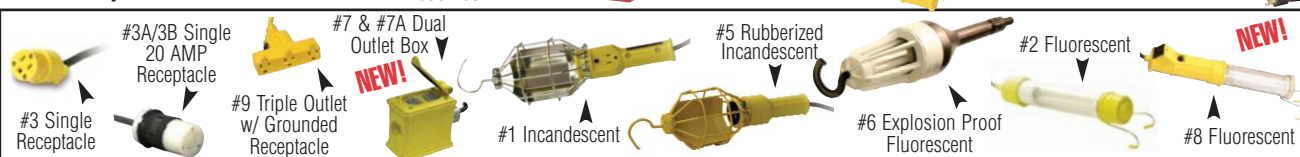

POWER CORD & CABLE REELS: SPRING RETRACTABLE Indoor non-weather tight applications only

MODEL	ACCESSORY	CORD SPECIFICATIONS				DIMENSIONS (in.)			VOLTS	AMPS	SHPG. WT (lbs.)
		LENGTH	# COND	AWG	TYPE	LENGTH	WIDTH	HEIGHT			
LD2030 163 9	Triple receptacle	30'	3	16	SJTW	9.75	4	11.5	125	10	9
LD2030 143 9	Triple receptacle	30'	3	14	SJTW	9.75	4	11.5	125	13	10
LG3050 143 9	Triple receptacle	50'	3	14	SJTW	11.5	5	15.25	125	13	15
LG3040 123 9	Triple receptacle	40'	3	12	SJTW	11.5	5	15.25	125	15	15
L 4035 163 3	Single receptacle	35'	3	16	SJTOW	12.625	9.375	13.25	125	13	22
L 4050 163 3	Single receptacle	50'	3	16	SJTOW	12.625	9.375	13.25	125	13	26
L 4545 123 3	Single receptacle	45'	3	12	SJEOW	12.625	9.375	13.25	125	15	28
L 5550 123 3	Single receptacle	50'	3	12	STOW	12.5	16.5	17.5	125	15	47
L 4545 123 3A	Single connector	45'	3	12	SJEOW	12.625	9.375	13.25	125	20	29
L 4545 123 3B	Twist lock connector	45'	3	12	SJEOW	12.625	9.375	13.25	125	20	29
L 4545 123 7A	Duplex outlet box w/GFCI (F)	45'	3	12	SJEOW	12.625	9.375	13.25	125	20	29
L 4545 123 7	Duplex outlet box w/GFCI (F)	45'	3	12	SJEOW	12.625	9.375	13.25	125	15*	29
L 5550 123 7	Duplex outlet box w/GFCI (F)	50'	3	12	STOW	12.5	16.5	17.5	125	20*	47
LD2040 163 2	Fluorescent	40'	3	16	SJTW	9.75	4	11.5	120	0.3	9
LG3050 163 8	Fluorescent	50'	3	16	SJTW	11.5	5	15.25	120	10	15
L 4035 163 1	Incandescent	35'	3	16	SJTOW	12.625	9.375	13.25	125	13	22
L 4050 163 1	Incandescent	50'	3	16	SJTOW	12.625	9.375	13.25	125	13	23
L 4035 162 2	Fluorescent	35'	2	16	SJTOW	12.625	9.375	13.25	125	0.3	23
L 4050 162 2	Fluorescent	50'	2	16	SJTOW	12.625	9.375	13.25	125	0.3	24
L 4035 A 163 5**	Rubberized incandescent	35'	3	16	SJOW	12.625	9.375	13.25	125	15	25
L 5245 A 163 6X**	Explosion-proof fluorescent	45'	3	16	SEOW	13.75	12.5	14.5	125	0.3	32
L 4035 163 8	Fluorescent light and outlet	35'	3	16	SJTO	12.625	9.375	13.25	125	10	26
L 4050 163 8	Fluorescent light and outlet	50'	3	16	SJTO	12.625	9.375	13.25	125	10	27

Incandescent bulb 75 watt maximum. For indoor use only. All models UL listed at 115 Volt 60 HZ single phase. * Inlet plug is NEMA5 - 15P configuration. Plug not set for 20 amps. ** Auto switch models.

LIGHT DUTY HAND CRANK PORTABLE POWER

MODEL (with cable)	CORD SPECIFICATIONS				VOLTS	AMPS	Wgt. lbs
	AWG	No. Cond.	Lgth.	Type			
LH2080 143	14	3	80'	SJTW	125	10	13
LH3100*	10	3	100'	STW	125	15	7

*Does not include cable

Series LH provides portable power with four circuit breakers built into the reel.

HEAVY DUTY FLYING LEAD CORD REELS Indoor non-weather tight applications only

MODEL FLYING LEAD	MODEL W/O CORD	REEL CAPABILITIES				VOLTS	AMPS	*SHPG. WT. (lbs)
		AWG	No. Cond.	Length	Type			
L 4050 163 X	L 4000	16	3	50'	SJO	115	15	22
L 4545 123 X	L 4500	12	3	45'	SJO	115	25	21
L 5550 123 X	L 5500	12	3	50'	STOW	115	20	34
L 5750 103 X	L 5700	10	3	50'	SO	115	35	37

All models UL listed at 115 Volt 60 HZ single phase; suitable for 220 V. For indoor use only. *Without cord.

North America: 800-444-3134

China: +86 (519) 8512 2391

Europe: +44 (0) 1536 406999

Pacific Rim: +63 (45) 625-6624

reelcraft.com

Latin America: 001-60-489-1685



Rely on Reelcraft™

Built Better to Perform Better™



North America and Corporate Headquarters

2842 E. Business Hwy 30
Columbia City, IN 46725-0248
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
reelcraft@reelcraft.com
www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958, Ft. Wayne, IN 46866
Ph: 260-489-1685 • Fax: 260-489-0203
info@t-i-i.com
www.reelcraft.com/latinamerica

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: +86 (519) 8512 2391 ext. 8002
Fax: +86 (519) 8512 9309
rco@reelcraftchina.com
www.reelcraft.com/china

Europe

Unit 17 • Cronin Courtyard • Weldon South Industrial Estate
Corby • Northamptonshire • NN18 8AG United Kingdom
Ph: +44 (0) 1536 406999 • Fax: +44 (0) 1536 406777
europe@reelcraft.com
www.reelcraft.com/europe

Pacific Rim

P.O. Box 53776, Clark Freeport Zone, Philippines 2023
Ph: +63 (45) 625-6624 • Fax: +63 (45) 321-0643
rap@comclark.com
www.reelcraft.com/asia

Australia

PO Box 6463 BC, Blacktown • NSW 2148, Australia
Ph: +61 (2) 9621 8988 • Fax: +61 (2) 9621 7688
sales@recoila.com
www.reelcraft.com

reelcraft.com

Form # MCAT-001 0908

